


Project:

Thin-Line LED Pendant

SKU: 2816.03-6-J20

One of our best selling families, Thin-Line is a system of minimally scaled LED linear pendants, [uplight/downlight wall bars](#), and [indirect light wall bars](#). Thin-Line is offered in a variety of lengths, finishes, and lighting configurations. Thin-Line Pendants are available in single- and double-sided configurations; the single-sided configurations can be installed as a downlight or up-light, providing direct or indirect illumination. The driver for this fixture must be installed in a remote location. If you would like the look of a smaller canopy than our standard, our [Optional Mini Box Canopy](#) is also available for the Thin-Line LED Pendant.

Learn more: <https://sonnemanlight.com/thin-line-led-pendant>

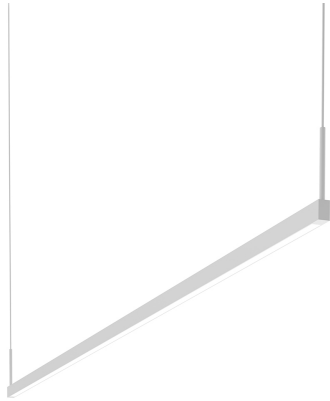

Dimensions

Height	5"
Width	72"
Length	0.75"
Hanging Details	20' Adjustable Cord
Size	6' One-Sided
Canopy/Backplate/Base	4.5"
Canopy/Backplate/Base Height	0.5"

Electrical Specs

Bulb(s) Included?	Yes
Bulb 1 Type	Integral LED
Total LED, Bulb or Socket Count	1
Input Voltage	120VAC
Wattage	36
Initial Lumens	2220
Delivered Lumens	1350
Kelvin	3000K
CRI	90
Power Supply Type	Driver
Power Supply Quantity	1
Power Supply Location	Remote
Dimming Type	TRIAC/ELV

Installation

Installation	Licensed electrician required
Cord Length	20 ft
Minimum Hanging Height	5.75"
Maximum Hanging Height	245"

Diffuser(s), Shade(s) and Lens(es)

Diffuser Type	Optical Acrylic
---------------	-----------------

Shipping

Carton 1 L x W x H	75" X 7" X 4"
Carton 1 Gross Weight	6 LBS

General Listings

Color/Finish	Satin White (.03)
Features	Damp Rated
Certification	C-ETL-US

Available Finishes

Available Finishes	Bright Satin Aluminum (.16), Satin Black (.25), Satin White (.03)
--------------------	-------------------------------------------------------------------

Available Color Temperatures

Available Color Temperatures	2700K, 3000K, 3500K
------------------------------	---------------------