WALL MOUNT FIXTURE

Please read carefully and save these instructions, as you may need them a

CAUTION

order to prevent possible shock Turn off the main power at the circuit breaker before installing the fixture, in

GENERAL


Electrical Code(N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician All electrical connections must be in accordance with local and National


instructions that no parts are missing by referencing the illustrations on the installation Remove the fixture and the mounting package from the box and make sure

ASSEMBLY AND INSTALLATION

RING

- upward 1.Attach the Cross Bar to the Outlet Box by the two Mounting Screw
- 3. Make wire connections 2.Screw the NIPPLE with the Washer and HEX NUT to the CROSS BAR
- ---White Wire from fixture to White Wire from power sourse
- ---Black Wire from fixture to Black Wire from power soure
- ---Loop the Ground Wire to Cross Bar with a Green Screw
- Place the Back plate against the Outlet box, secure with the Ball nut
- with the King Put the Glass (GLASS SOLD separately) onto the Socket and screw

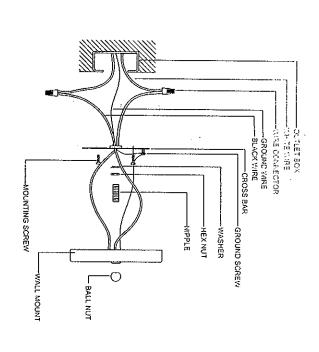



ITEM NO. 110 BRZ