


ASSEMBLY INSTRUCTIONS

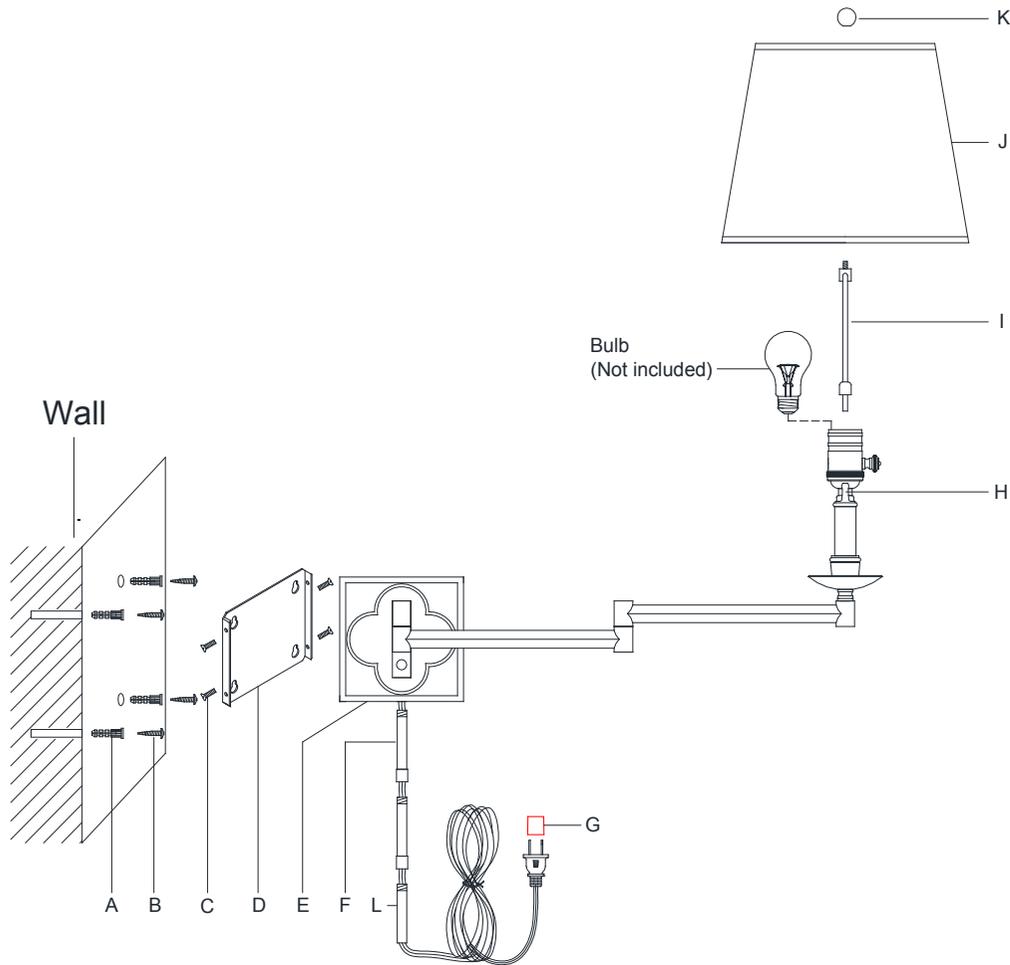

Griffith Swing Arm

Item # SK 2109

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

1. Carefully remove all parts from the box.
2. Remove the mounting plate (D) from the backplate (E) by loosening the side screws (C).
3. Drill 4 holes on the wall and make sure the hole distance will match to the hole on the mounting plate (D) exactly.
4. Knock the anchors (A) into the wall holes.
5. Affix mounting plate (D) onto the wall and secure with mounting screws (B).
6. Thread the tube (F) to the backplate (E).
7. Thread the tube (L) to the tube (F).
8. Attach the fixture onto the mounting plate (D) and secure with side screws (C).
9. Install harp (I) onto the saddle (H).
10. Place shade (J) to the harp (I) and secure with finial (K).
11. Insert bulb (not included) into the socket.
12. Remove protective plug cover (G) from the plug.
13. Plug into a proper electrical outlet and test the fixture.

***Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.