

SL2706


ASSEMBLY & INSTALLATION GUIDE

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

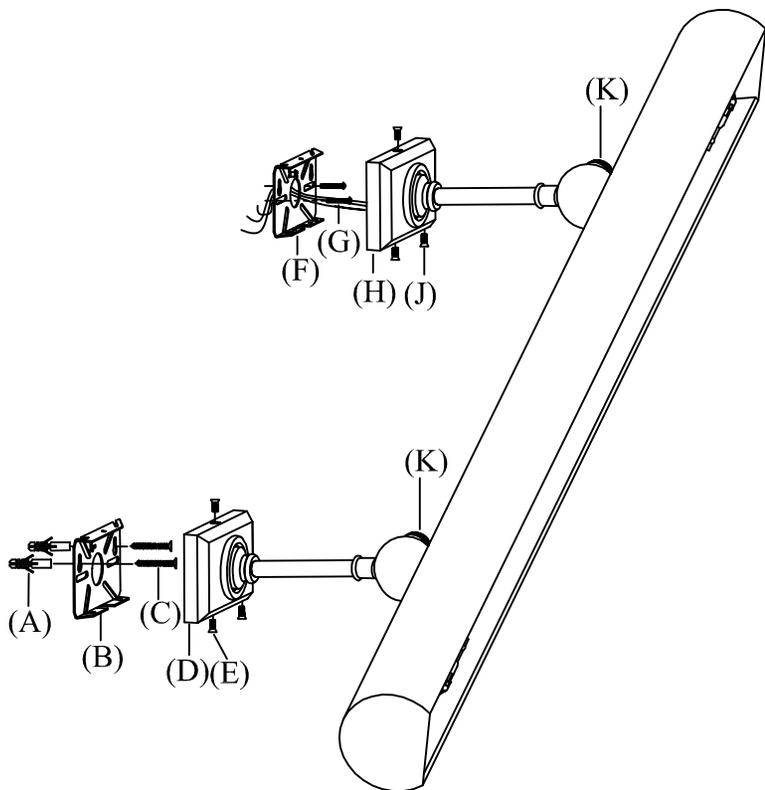

1. Remove back plates (B) and (F) from fixture bases (D) and (H) by unscrewing base screws (E) and (J).
2. Affix back plate (F) to wall outlet box with back plate screws (G) provided.
3. Place fixture base (H) over the affixed back plate (F) and mark outline of fixture bases (D). Use a level to make sure both bases are level. Remove the whole fixture from wall.
4. Place back plate (B) to marked location, use it as a template, and mark points for both keyholes on the wall. Remove back plate (B).
5. Drill small holes into your marked points on the wall. The holes should be large enough to accommodate the plastic anchors (A). Push the plastic anchors (A) into the holes in the wall.
6. Position back plate (B) on the wall by aligning the center hole of plastic anchors (A) with keyholes of back plate and secure by inserting screws (C) provided.
7. Attach ground (green) wire to ground wire from wall outlet box (usually green or copper in color), fasten together with a plastic wire connector. Tightly wrap the wire connector with electrical tape so the end of the connector is sealed. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
8. Connect neutral (white) fixture wire coming from fixture base to neutral (usually white) outlet wire. Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape.
9. Repeat the procedure with the hot (black) wires. Always make sure that no wire strands are left outside the connectors. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
10. Attach fixture bases (D) and (H) to the affixed back plates (B) and (F) by aligning the holes and inserting base screws (E) and (J). Tighten with screwdriver.
11. Insert light bulbs into sockets.
12. ADJUSTMENT INSTRUCTIONS
 1. Loosen the adjustment keys (K).
 2. Adjust lamp shade to desired position.
 3. Tighten the adjustment keys (K).