

#### GENERATION COLLECTION

# TRAVERSE 6" ROUND T24 3000K 90CRI

14230S - 15 www.visualcomfort.com

## **General Product Information**



















Please visit <u>www.visualcomfort.com</u> for warranty information.

## **Required Tools**





## **Safety Information**

## **CAUTION-RISK OF FIRE**


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

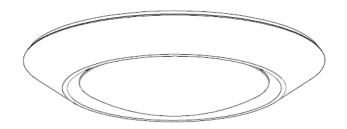

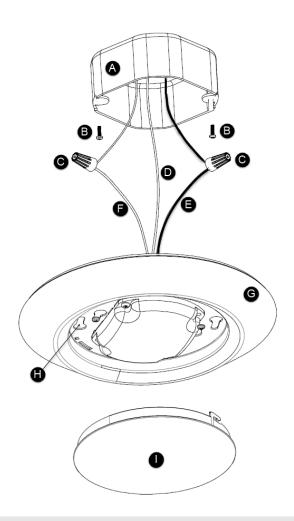

## FIXTURE PARTS

- A. Junction Box
- B. Junction Box Screws
- C. Wire Nuts
- D. Ground Wire
- E. Hot Fixture Wire
- F. Neutral Wire
- G. Fixture
- H. Key Hole Slots
- I. Diffuser

# **INSTRUCTIONS**

#### I. Preparing the Fixture

- 1. Remove the diffuser from the fixture by twisting it counterclockwise.
- 2. Install junction box screws into the junction box, while leaving enough length to install the fixture using the keyhole slots.

#### II. Wiring the Fixture

- 1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
- 2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
- 3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire (black) and hot power line wire from the junction box (hot to hot)
  - b) Neutral fixture wire (white) and neutral power line wire from the junction box (neutral to neutral)
  - 4. Carefully tuck all wires into the junction box.

## III. Installing the Fixture

- 1. Align the keyhole slots on the fixture with the junction box screw until snug.
- 2. Reinstall the diffuser by screwing it clockwise onto the fixture.

#### **FCC STATEMENT**

Supplier's Declaration of Conformity 47 CFR § 2.1077 Compliance Information

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: this equipment has been tested and found to comply with the limits for a class b digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/tv technician for help.

Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.