


FULLTON NINE-LIGHT CHANDELIER


3164209

General Product Information




Intertek


SAVE THESE INSTRUCTIONS!




STANDARD INSTALLATION




INDOOR




DAMP LOCATION SAFE




NEC COMPLIANT JUNCTION BOX




BULB(S) (NOT INCLUDED)




CONVERTS TO LED




PLEASE SEE visualcomfort.com FOR PRODUCT SPECS




BEST PRACTICE: HANDLE FIXTURE WITH GLOVES



CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!




Product Warranty




FCC Statement


Suggested/Required Tools




ELECTRIC DRILL



PHILLIPS-HEAD SCREWDRIVER



WIRE CUTTER




PENCIL/MARKER

Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

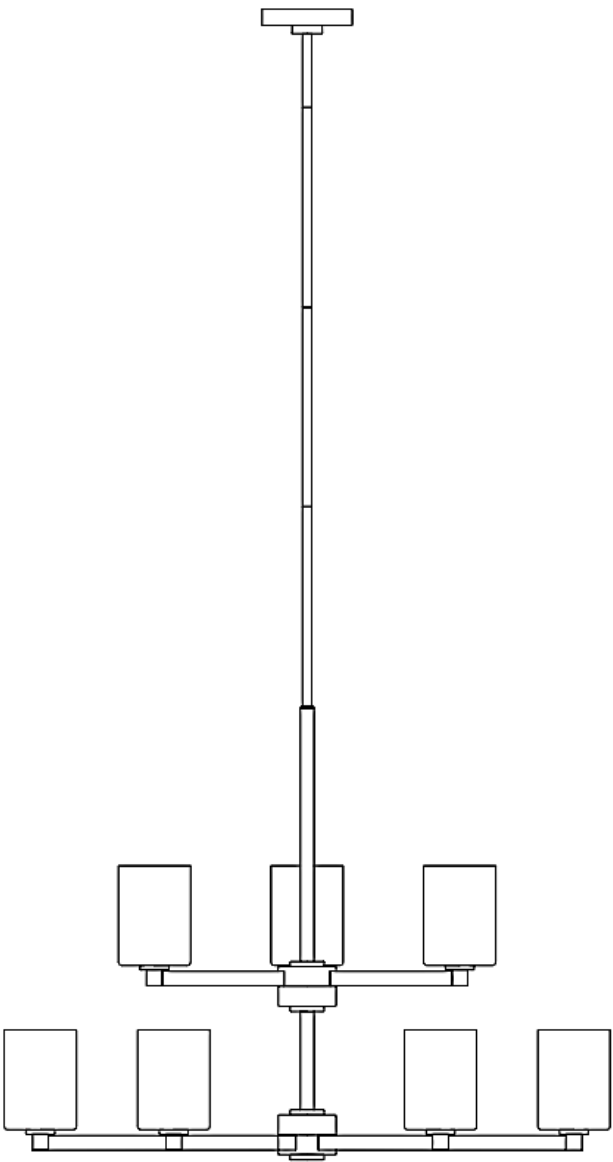

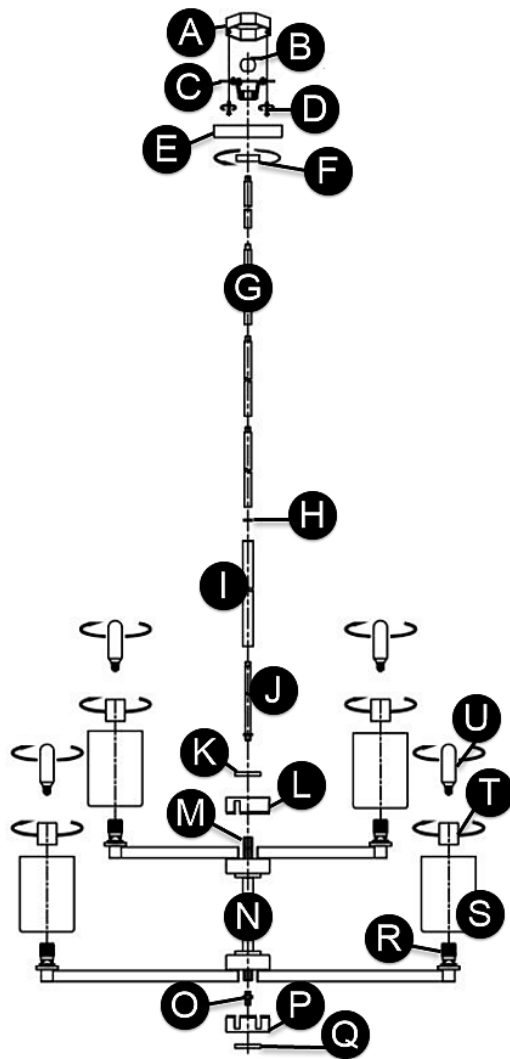

FIXTURE PARTS

- A. Junction Box
- B. Half Ball
- C. Mounting Plate
- D. Mounting Screws
- E. Canopy
- F. Collar Nut
- G. Stem
- H. Washer
- I. Bottom Stem
- J. Threaded Pipe
- K. Cover
- L. Top Cup
- M. Coupler
- N. Fixture
- O. Nipple
- P. Bottom Cup
- Q. Cover
- R. Sockets
- S. Glass Shades
- T. Socket Rings
- U. Bulbs (Not Included)

INSTRUCTIONS

I. Preparing the Fixture

1. Spread the fixture arms evenly.
2. Screw the nipple to the bottom of the fixture, then place the cup over the nipple and secure it in place by screwing the cover onto the nipple.
3. Feed the fixture wires through the top cup and cover, then place them on the coupler.
4. Feed the fixture wires through the threaded pipe, bottom stem, and washer, then screw the threaded pipe to the top of the coupler. Let the bottom stem slide over the threaded pipe and install the washer onto it.
5. Screw the half ball to the top stem.
6. Determine the desired height or look of the fixture with the provided stems, then screw them together to assemble them accordingly.
7. Feed the fixture wires through the stem assembly, then install the stem assembly on the bottom stem.
8. Feed the fixture wires through the collar nut, canopy, and half ball assembly, and screw it onto the stem assembly.
9. Align and secure the mounting plate to the junction box, then slide the half ball assembly onto the mounting plate.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black/smooth) to hot power line wire
 - b) Neutral fixture wire (white/textured) to neutral power line wire
4. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. Place the canopy onto the mounting plate and secure it in place by screwing the collar nut tightly onto it.
2. Secure the glass shades to the sockets by screwing the socket rings on tightly over them.
3. Screw the bulbs into the sockets. Refer to the socket label for max wattage information.