





FULLTON THREE-LIGHT SEMI-FLUSH MOUNT

7764203

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

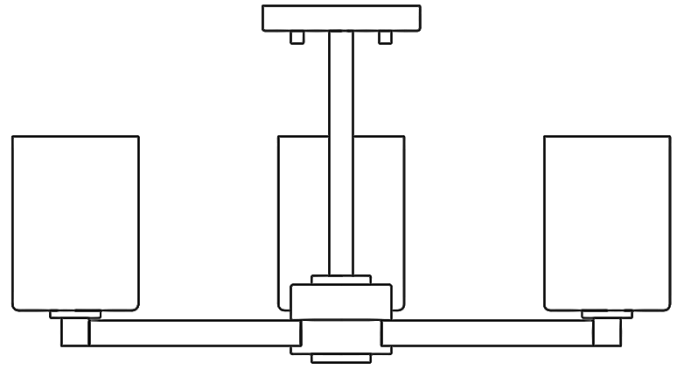

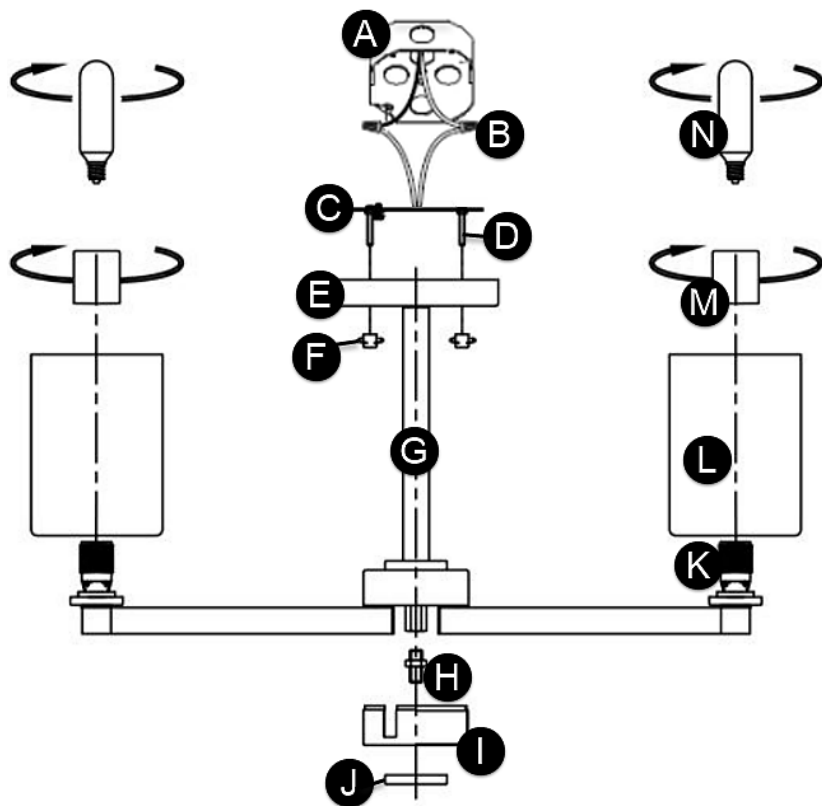

FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Plate & Mounting Screws (Not Illustrated)
- D. Mounting Studs
- E. Canopy
- F. Cap Nuts
- G. Stem
- H. Nipple
- I. Cup
- J. Cover
- K. Sockets
- L. Glass Shades
- M. Socket Rings
- N. Bulbs (Not Included)

INSTRUCTIONS

I. Preparing the Fixture

1. Secure the mounting plate to the junction box with the provided mounting screws.
2. Spread the fixture arms evenly.
3. Screw the nipple to the bottom of the fixture, then place the cup over the nipple and secure it in place by screwing the cover onto the nipple.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black/smooth) to hot power line wire
 - b) Neutral fixture wire (white/textured) to neutral power line wire
4. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. Place the canopy onto the mounting studs and secure it in place by screwing the cap nuts onto the studs.
2. Install the glass shades over the sockets and secure them in place by screwing on the socket rings.
3. Screw the bulbs into the sockets. Refer to the socket labels for max wattage information.