




ANDERS LARGE LINEAR CHANDELIER

GLC1184

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

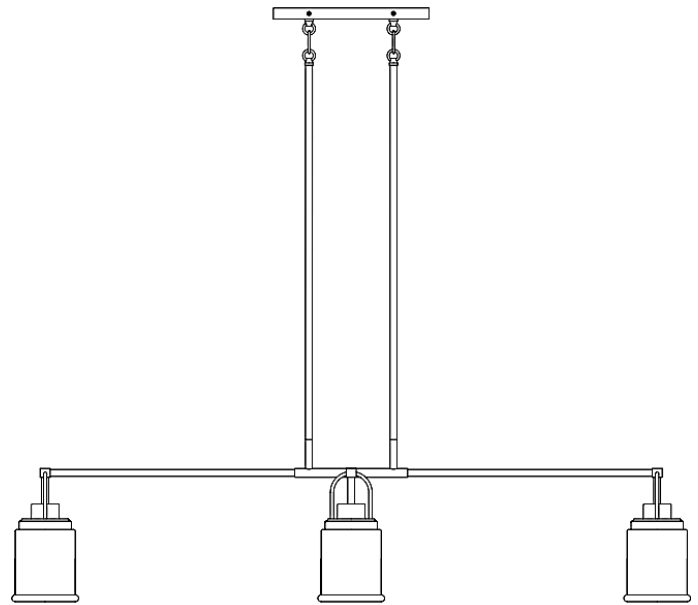

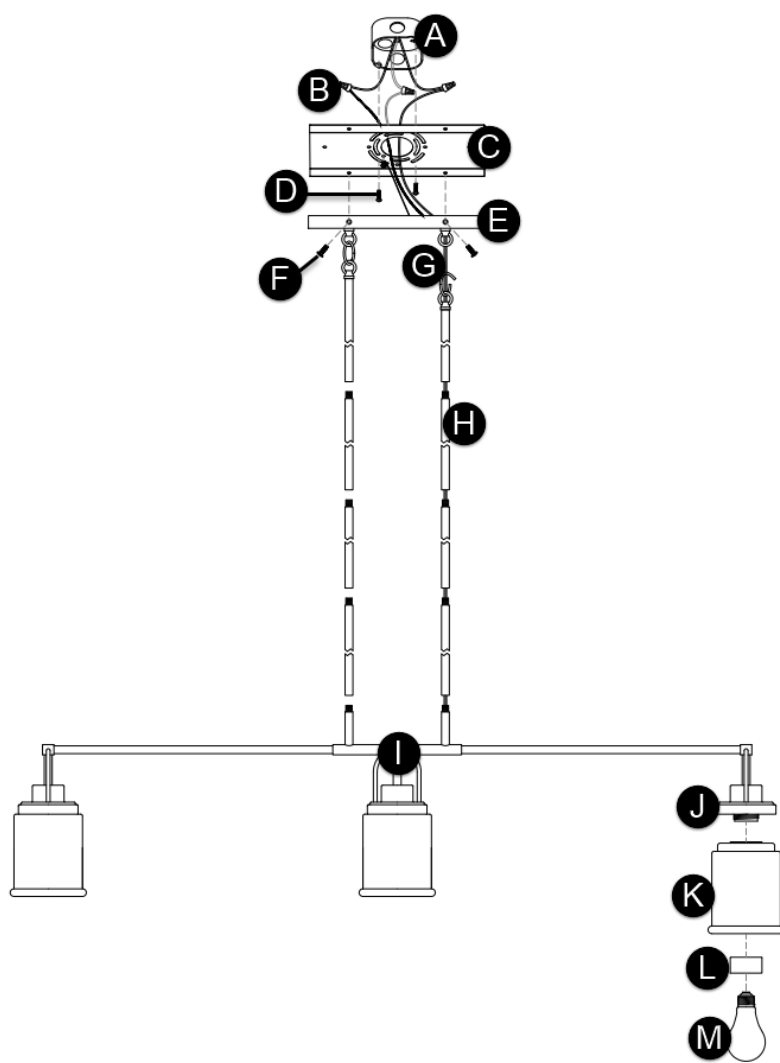

FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Plate
- D. Mounting Screws
- E. Canopy
- F. Canopy Screws
- G. Link & Loop
- H. Stem Assembly
- I. Fixture
- J. Sockets
- K. Shades
- L. Socket Rings
- M. Bulbs (Not Included)

INSTRUCTIONS

I. Preparing the Fixture

1. Separate the mounting plate from the canopy and install the mounting plate onto the junction box with the mounting screws.
2. Determine the desired height of the fixture and complete the stem/link and loop (if needed) and assemble by screwing them together accordingly.
3. Feed the fixture wires through the stem/link and loop assembly.
4. Screw the stem/link and loop assembly on top of the fixture and feed the fixture wires through the canopy.
5. Attach the canopy to the top of the stem/link and loop assembly by tightening the hex nuts and washers on the canopy.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black/smooth) to hot power line wire
 - b) Neutral fixture wire (white/textured/ribbed) to neutral power line wire
4. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. Mount the canopy onto the mounting plate and secure it in place tightly with the canopy screws.
2. Install the shade(s) onto the socket(s) and secure it with the socket ring(s).
3. Screw the bulb(s) into the socket(s). Refer to the socket label for max wattage information.