

WARREN DARK SKY MEDIUM, LARGE, & X-LARGE WALLS

SLO1241; SLO1251; SLO1261

General Product Information




SAVE THESE INSTRUCTIONS!



STANDARD INSTALLATION



OUTDOOR



NEC COMPLIANT JUNCTION BOX



WET LOCATION SAFE



LED



DARK SKY FRIENDLY



DIMMER COMPATIBLE



PLEASE SEE visualcomfort.com FOR PRODUCT SPECS



CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!



BEST PRACTICE: HANDLE FIXTURE WITH GLOVES



Product Warranty



FCC Statement

Tools Required/Suggested



ELECTRIC DRILL



PHILLIPS-HEAD SCREWDRIVER



CAULK GUN



PENCIL/MARKER

Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

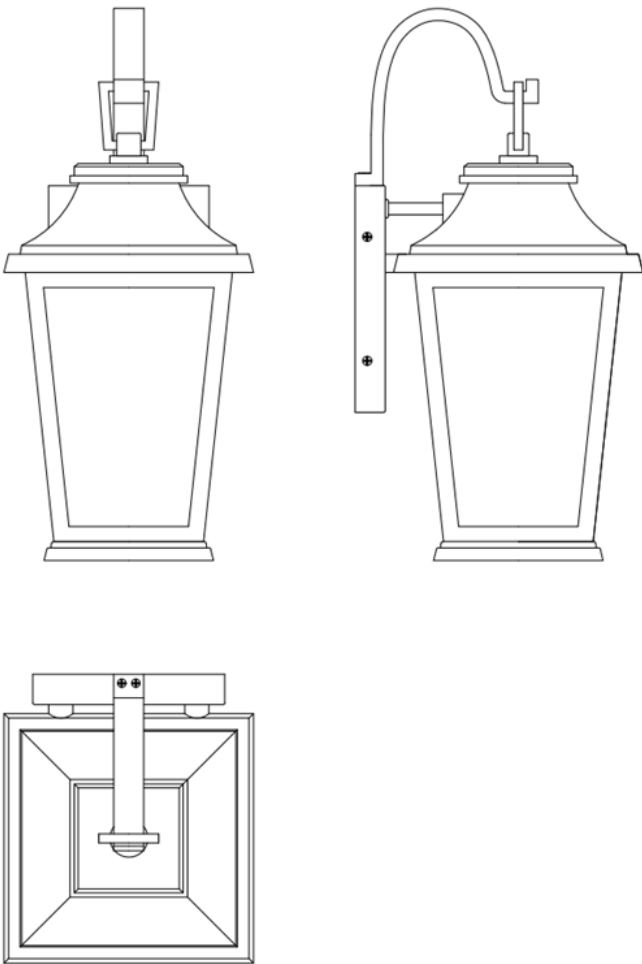

FIXTURE PARTS

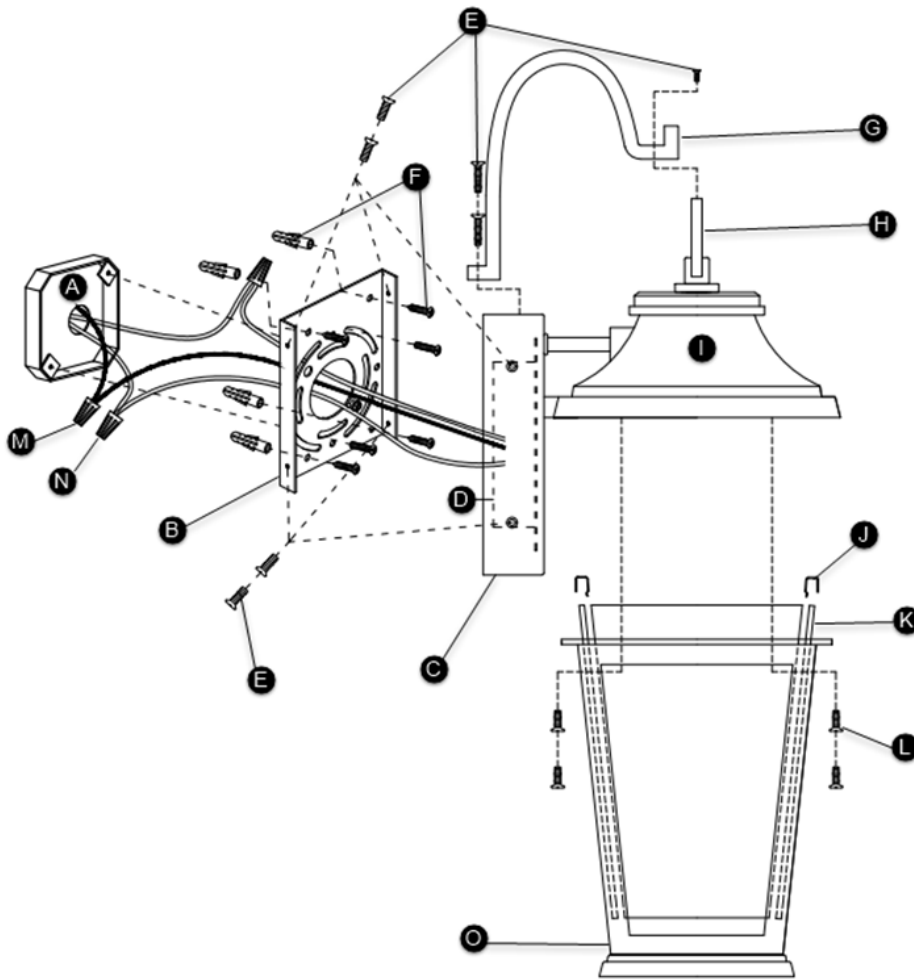

- A. Junction Box
- B. Mounting Plate
- C. Fixture Base
- D. Driver
- E. Fixture Screws
- F. Mounting Screws and Anchors
- G. Fixture Arm
- H. Fixture Loop
- I. Top Cover
- J. Glass Clip
- K. Glass Panel
- L. Cover Screw
- M. Fixture Wires
- N. Fixture Wires
- O. Lower Cover

INSTRUCTIONS

I. Preparing the Fixture

1. Temporarily install the mounting plate to the junction box and mark the anchor hole locations through the mounting plate holes. Remove the mounting plate.
2. Drill appropriately sized holes at the marked locations and install the anchors.
3. Secure the mounting plate to the junction box.
4. Screw the anchor screws into the anchors.
5. Attach the fixture arm to the fixture base and fixture loop with the provided screws.
6. Slide glass panels into the lower cover and secure each panel with clips.

II. Wiring the Fixture

7. Connect the fixture to a suitable ground in accordance with local electrical codes.
8. Connect the white fixture wire to the neutral power line wire with a wire nut.
9. Connect the black fixture wire to the hot power line wire with a wire nut.

III. Installing the Fixture

10. Mount the fixture base onto the mounting plate and secure it with the fixture screws.
11. Install the lower cover to the top cover by using the cover screws.
12. For wet locations, caulk around the base of the fixture with waterproof construction sealant.