


TUBE ARCHITECTURAL DS-CD05

LED Ceiling Mounts

WAC LIGHTING®

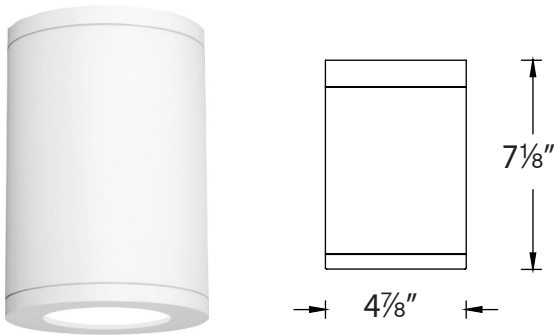

Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cylindrical profile delivers accent lighting. Comes in various light beam angle options.

FEATURES

- High performance exterior rated LED ceiling light
- Solid aluminum construction
- 39° visual cutoff angle or glare control
- 5 year warranty

SPECIFICATIONS

- Input:** Universal voltage 120V - 277VAC, 50/60Hz
- Dimming:** Electronic low voltage (ELV): 100% - 5%
0-10V: 100% - 1%
- Light Source:** High output 3 Step Mac Adam Ellipse COB
Rated life of 60,000 hours at L70
- Finish:** Electrostatically powder coated, white, black, bronze and graphite
- Standards:** IP65 rated, ETL & cETL wet location listed, Title 24 JA8 Compliant
- Operating Temp:** -13°F to 122°F (-25°C to 50°C)

ORDERING NUMBER

| Diameter | Watt | Beam | Beam Angle | Color | Temp | CRI | Reference Lumens | Output ¹ CBCP | Efficacy (Lm/W) | Light Distribution | Finish |
|-----------|-------|-------------|------------|-------|-------|-----|------------------|--------------------------|-----------------|--------------------|--|
| DS-CD05 | 25W | S Spot | 16° | 927 | 2700K | 90 | 1825 | 10050 | 73 | | BK Black WT White BZ Bronze GH Graphite |
| | | | | 27 | 2700K | 85 | 2190 | 12057 | 88 | | |
| | | | | 930 | 3000K | 90 | 1895 | 10427 | 76 | | |
| | | | | 30 | 3000K | 85 | 2300 | 12644 | 92 | | |
| | | | | 35 | 3500K | 85 | 2350 | 12937 | 94 | | |
| DS-CD0517 | 17W | N Narrow | 25° | 927 | 2700K | 90 | 1810 | 5280 | 72 | | |
| | | | | 27 | 2700K | 85 | 2170 | 6335 | 87 | | |
| | | | | 930 | 3000K | 90 | 1880 | 5478 | 75 | | |
| | | | | 30 | 3000K | 85 | 2275 | 6643 | 91 | | |
| | | | | 35 | 3500K | 85 | 2330 | 6797 | 93 | | |
| DS-CD0517 | 17W | F Flood | 33° | 927 | 2700K | 90 | 1900 | 4515 | 76 | | |
| | | | | 27 | 2700K | 85 | 2280 | 5417 | 91 | | |
| | | | | 930 | 3000K | 90 | 1970 | 4685 | 79 | | |
| | | | | 30 | 3000K | 85 | 2390 | 5681 | 96 | | |
| | | | | 35 | 3500K | 85 | 2445 | 5812 | 98 | | |
| 40 | 4000K | 85 | 2470 | 5870 | 99 | | | | | | |

DS-CD05-_____ - _____

¹Reference output shows 25W output. Multiply by 0.7 to determine output for 17W combinations.

Example: DS-CD05-N927-BK

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters, East Manufacturing Facility

44 Harbor Park Drive

Port Washington, NY 11050

South East Manufacturing Facility

1600 Distribution Ct

Lithia Springs, GA 30122

Central Manufacturing Facility

1700 South J Elmer Freeway, Ste 100

Cedar Hill, TX 75104

West Manufacturing Facility

1750 S Archibald Ave

Ontario, CA 91761