

R2FSA1T-WD

FQ 2" Shallow - Square Adjustable Trim (Dim-To-Warm)

WAC



Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION


The FQ Recessed series offers a complete line of high performance LED luminaires that provide outstanding functionality and quality. The series features superlative glare control with 30° shielding, 35° vertical tilting and uniform floor-to-ceiling wall washing. Multiple power level options and a full line of round and square, trimmed and trimless luminaires offer versatile solutions for various lighting applications. Easy to order, install, and service.

FEATURES

- Two-piece die-cast construction, compact size suitable for shallow ceiling plenum
- Light engine mounted on trim with springs for easy replacement
- 0-35° vertical tilting
- Center beam alignment retained throughout adjustment range
- Field changeable beam angle with reflectors provided
- Accepts one Lens or glare control accessory
- 5 year WAC Lighting product warranty

SPECIFICATIONS

- Construction:** Durable die-cast aluminum construction
- Input:** Universal 120-277V AC 50/60 Hz
- Dimming:** Electronic Low Voltage (ELV): 100%-1%
TRIAC: 100%-1%
0-10V: 100-1%
- Light Source:** High output 3-step Mac Adam Ellipse COB
Rated life of 50,000 hours at L70
- Mounting:** Heavy gauge retention clips support trim firmly.
Safety cabling standard. Ceiling cutout: Ø 3 1/2"
Accommodates 1/2" - 1" ceiling thickness
- Finish:** Electrostatically powder coated White, Black, Dark Bronze. Enamel coated Haze.
- Standards:** ETL & cETL Damp Location Listed,
Title 24 JA8-2019 Compliant.

	Model	Beam	Lumens	CBCP	Color Temp	CRI	Finishes	Reflector/Trim
	R2FSA1T Square Trim	F 40° W 55°	865 835	1575 1145	WD 3000K-1800K	90	BK DB HZWT WT	Black Dark Bronze Haze/White White

R2FSA1T-WD-__

Example: **R2FSA1T-WD-WT** (Beam F-40° reflector is pre-installed. Beam W-55° reflector is included)

Please see next page for housing units (required)

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters, East Manufacturing Facility
44 Harbor Park Drive
Port Washington, NY 11050

South East Manufacturing Facility
1600 Distribution Ct
Lithia Springs, GA 30122

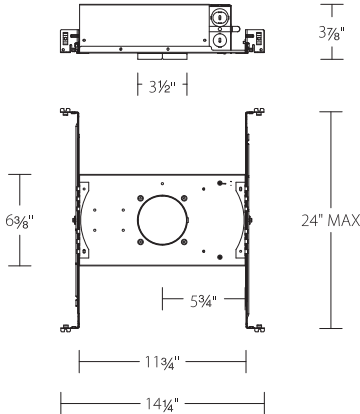
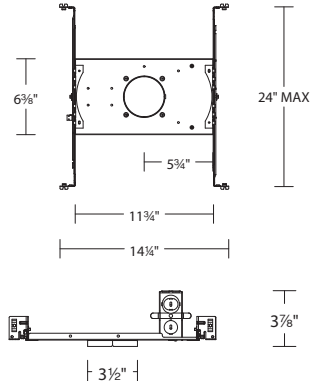

Central Manufacturing Facility
1700 South J Elmer Freeway, Ste 100
Cedar Hill, TX 75104

West Manufacturing Facility
1750 S Archibald Ave
Ontario, CA 91761

R2FSA1T-WD

FQ 2" Shallow - Square Adjustable Trim (Dim-To-Warm)

WAC

HOUSING (Required)		Model	Power
New Construction IC Airtight		R2FBN1T	1 15W IC
New Construction Frame-in Non-IC		R2FBFT	1 15W Non-IC
Remodel Non-IC		R2FBRT	1 15W Non-IC

R2FB__ - __

Example: R2FBN1T-1

GLARE CONTROL ACCESSORIES

LENS-11-HCM	Honeycomb Louver
LENS-11P-CRL-BK	Cross Louver

LENS ACCESSORIES

LENS-11	AMB RED BLU GRN SPR BEL	Amber Red Blue Green Spread Beam Elongating
---------	--	--

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters, East Manufacturing Facility
44 Harbor Park Drive
Port Washington, NY 11050

South East Manufacturing Facility
1600 Distribution Ct
Lithia Springs, GA 30122

Central Manufacturing Facility
1700 South J Elmer Freeway, Ste 100
Cedar Hill, TX 75104

West Manufacturing Facility
1750 S Archibald Ave
Ontario, CA 91761