


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER!


NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

Installation Steps:

1. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
2. Attach the crossbar to the outlet box using two outlet box screws as shown. **The side of the crossbar marked "GND" must face out.**
3. Guide the supply wires and ground wire from outlet box through the center hole on the crossbar.
4. Make wire connections:
 - attach fixture ground wire to supply ground wire using a wire nut or attach them to the crossbar with a green ground screw.
 - attach white wire from light to white wire from power source with a wire nut.
 - attach black wire from light to black wire from power source with a wire nut.Observing: ground wire with ground wire, neutral wire with neutral wire, hot wire with hot wire.
***Make sure all wire connectors are secured and do not easily pull off with the slight tug.
5. Once all wires are connected, tuck them carefully into outlet box.
6. Place the lamp body's back plate over the crossbar, aligning the back plate mounting holes with screw holes of the crossbar on side, then lock it securely with mounting screws.
7. Install the light bulbs (Not included) in accordance with the fixture's specifications.
NOTE: DO NOT EXCEED THE MAXIMUM WATTAGE RATING!
8. Your installation is now complete. Return power to the outlet box and test the lamp body.
9. **NOTE: To clean, wipe fixture with a damp soft cloth. Then dry immediately with a dry soft cloth. Clean glass with a mild soap. DO NOT use chemical cleaners or abrasive materials such as scouring pads or powders, steel wool or abrasive paper.**

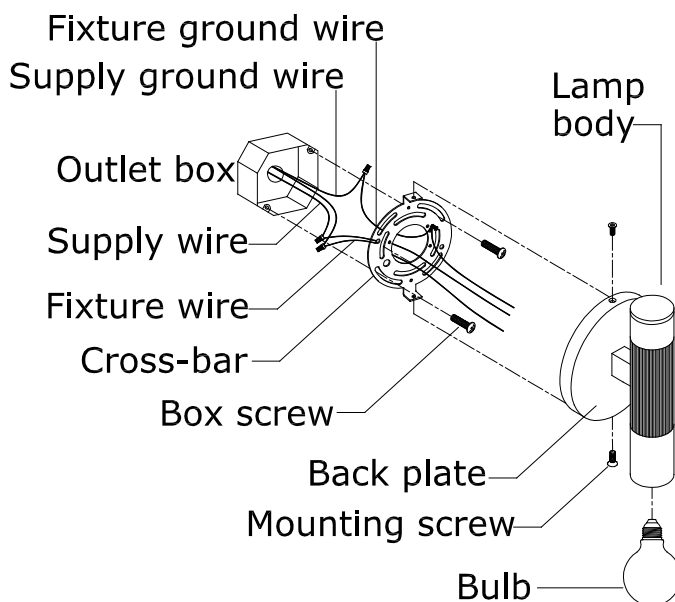

1956-1S-XX

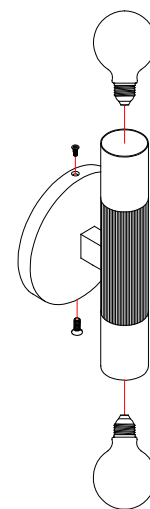

1956-2S-XX