Barn Light Outdoor Wall

8537401, 8637401, 8737401, 8837401

GENERATION LIGHTING

Outdoor

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction hoxes.

This product is safety listed for wet locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.


GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077 800.969.3347


www.generationlighting.com

© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

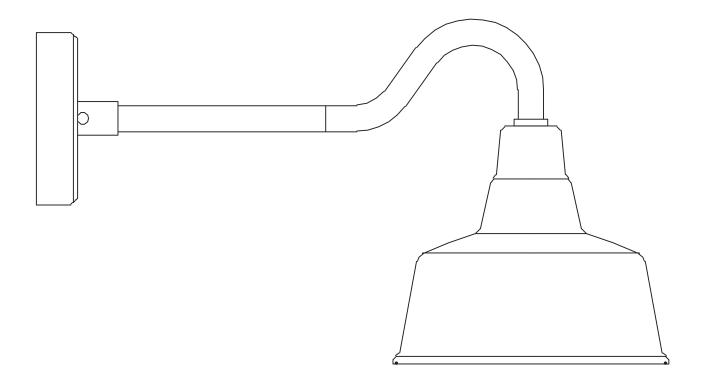

Install the Fixture

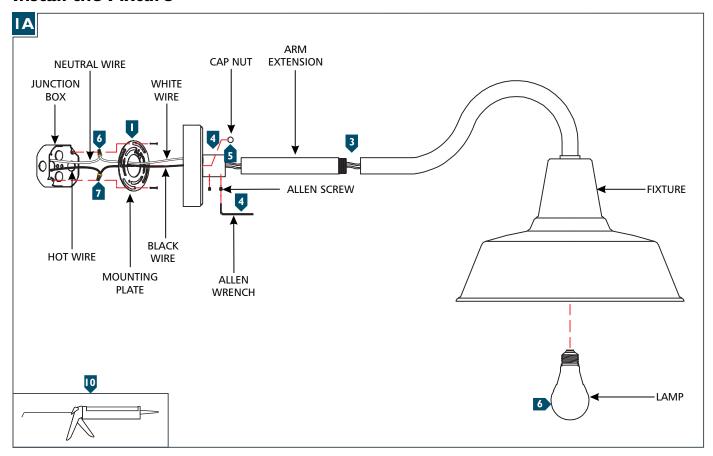

- I Secure the mounting plate to the junction box.
- 2 Optional: Feed fixture wires through the arm extension and screw the threaded end of the fixture arm into the fixture.
- 3 Feed the fixture wires into the fixture base.
- Insert the fixture arm into the fixture base and secure in place with the provided allen screws.
- 5 Connect the fixture to a suitable ground in accordance to local electrical codes.
- 6 Connect the white fixture wire to the neutral power line wire with a wire nut.
- Connect the black fixture wire to the hot power line wire with a wire nut.
- 8 Neatly place the wires into the junction box, mount the fixture base onto the mounting plate studs, and secure it with the two cap nuts.
- Screw the lamp into socket. Refer to the label on the socket for Max Wattage Information.
- Caulk around the base of the fixture with waterproof construction sealant.