GENERATION LIGHTING

Ceiling

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction hoxes.

This product is safety listed for damp locations.


Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved

Use minimum 90°c supply conductors.

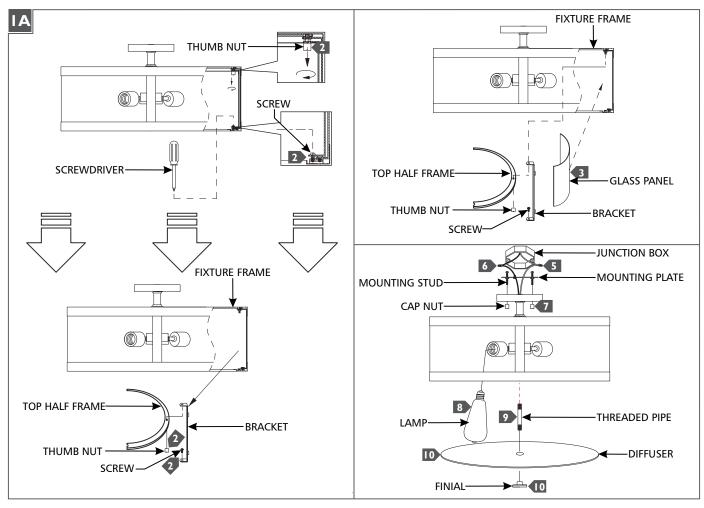

- Install the mounting studs to the mounting plate, then secure the mounting plate to the junction box.
- To install the glass panels, remove the two top half rings by loosening the four cap nuts and then remove the four side brackets by loosening the four screws on the bottom frame with a screwdriver.
- Insert the glass panels into the fixture frame and reinstall the side brackets and fasten the screws on the bottom frame. Then reinstall the two top half rings and secure them by fastening the four cap nuts.
- 4 Connect the fixture to a suitable ground in accordance to local electrical codes.
- Connect the white fixture wire to the neutral power line wire with a wire nut.
- 6 Connect the black fixture wire to the hot power line wire with a wire nut.
- Place the fixture base onto the mounting studs and secure it in place by screwing the cap nuts onto the studs.
- 8 Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage Information.
- 9 Screw the threaded pipe to the bottom of the fixture.
- Place the diffuser onto the threaded pipe and secure it in place by screwing the finial onto the pipe.

SAVETHESE INSTRUCTIONS!

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077 800.969.3347

www.generationlighting.com

© 2018 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.