

WALL COLLECTION

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.




This product is suitable for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer.

LED version may be dimmed with a LED or TRIAC dimmer. Consult lamp manufacturer for additional information.

Install the Fixture

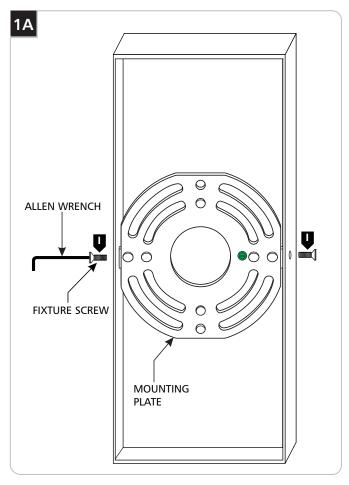


- 1 Remove the fixture screws located on both sides of the fixture base with the provided Allen wrench.
- 2 Remove the mounting plate from the fixture base.



CAUTION - RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

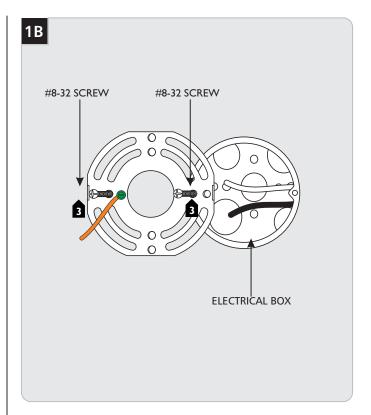


Install the mounting plate onto the electrical box with the two #8-32 screws provided.

Install the Lamp

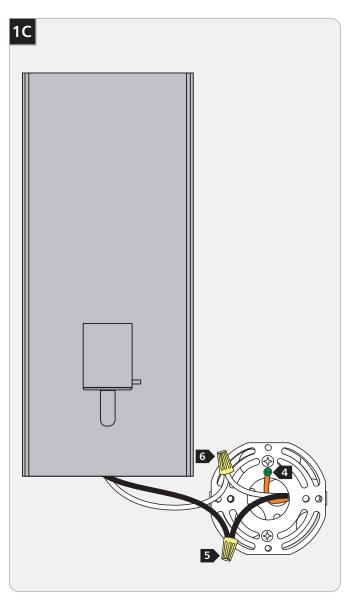

- Connect the mounting plate ground wire to a suitable ground in accordance with local electrical codes.
- Connect the black fixture wire to the hot power line wire with a wire nut.
- 6 Connect the white fixture wire to the neutral power line wire with a wire nut.
- Properly place all wires and wire nut connections into the fixture base.
- Mount the fixture by sliding it back onto the mounting plate and reinstalling the fixture screws (reversal of figure 1A).

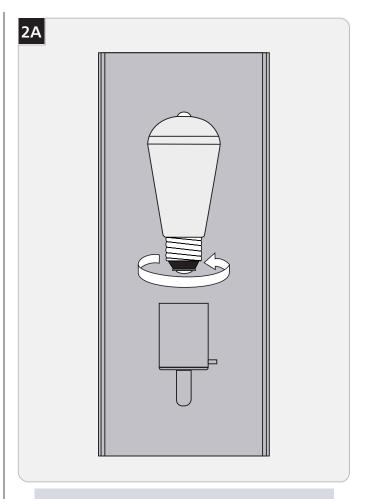

CAUTION: To reduce the risk of a burn or electric shock during re-lamping, disconnect the power to the fixture.

Refer to fixture marking for lamp information.

1 Screw the lamp into the socket.

SAVE THESE INSTRUCTIONS!

TECH LIGHTING

7400 Linder Ave, Skokie, IL 60077 847.410.4400

www.techlighting.com

© 2017 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company