## PRODUCT FEATURES

- From the brand formerly known as Tech Lighting
- Uniquely designed chandelier with the flexibility of a custom lowvoltage rail system
- · Ideal for living rooms, dining rooms, and home offices
- Fully dimmable LED lamp



### LAMPING

Includes (9) 12 volt 8 watt, 485 delivered lumens (4365 total delivered lumens), 3000K, replaceable LED MR16. Ships with six feet of field-cuttable cable. Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer).

Blok Large Chandelier



Blok Large Chandelier

### ORDERING INFORMATION

700BLKL	SHAPE OR SIZE	FINISH	LAMP
	9 LIGHT 9	R AGED BRASS	-LED930R 12 VOLT LED 90 CRI 3000K REMOTE
			-LED930S 12 VOLT LED 90 CRI 3000K SURFACE


700BLKL	
JOB NAME	
NOTES	



# **BLOK LARGE CHANDELIER**

## **SPECIFICATIONS**

PRIMARY MATERIAL	Metal			
SHADE MATERIAL	Metal			
NET WEIGHT				
HEIGHT	8.8in			
WIDTH				
LENGTH	96in			
UP LIGHT / DOWN LIGHT / BOTH?				
WET LISTED				
DAMP LISTED				
DRY LISTED				
MIN. HANGING HEIGHT	37.8in			
MAX HANGING HEIGHT	103.8in			
TOTAL CORD LENGTH	72in			
TOTAL STEM LENGTH				
STEM QTY				
SLOPED CEILING ADAPTABLE?	No			
GENERAL LISTING	ETL Listed			
INCLUDES				

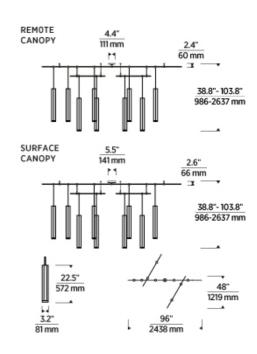

### LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS	4365			
WATTS	8			
MAX WATTAGE PER BULB	50W			
	12V ELV			
ССТ	3000K			
CRI	90 CRI			
LED LIFETIME				
L70	>25000			
AVERAGE BULB HOURS				
FIELD SERVICEABLE LED				
LAMP BASE	GU5.3			
LAMP SHAPE	MR16			
LAMP INCLUDED?	True			
WARRANTY**	1 Year			

<sup>\*</sup> Dimming information available at <u>www.techlighting.com/Downloads#dimming</u>

## T20 / T24 / JA8 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6/JA8.		Yes	
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.		Yes	

 $<sup>^{\</sup>star}$  If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.



<sup>\*\*</sup> Visit techlighting.com for specific warranty limitations and details.