# INSTALLATION AND SAFETY INSTRUCTIONS

### FOR YOUR SAFETY

WARNING: BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS SHUT OFF. GENERAL You don't need special tools to install this fixture. Be sure to follow the steps in the order given. Under no circumstances should a fixture be hung on house electrical wires, nor should a swag type fixture be installed on a ceiling which contains a radiant type heating system. Read instructions carefully. If you are unclear as to how to proceed, consult a qualified electrician. NOTE: Proper wiring is essential for the safe operation of this fixture.

# **GENERAL**

You don't need special tools to install this fixture. Be sure to follow the steps in the order given. Under no circumstances should a fixture be hung on house electrical wires, nor should a swag type fixture be installed on a ceiling, which contains a radiant type heating system. Read instructions carefully. If you are unclear as to how to proceed, consult a qualified electrician.

NOTE: Proper wiring is essential for the safe operation of this fixture.

### FIXTURE ASSEMBLY

Carefully removed the fixture from the carton and check that all parts are included as shown in figure. Be careful not to misplace any of the screws or parts, which are needed to install this fixture.

### INSTALLATION

**IMPORTANT:** Do not attach fixture directly to outlet box. **STEP1:** Secure universal mounting plate(L) on to outlet box with box screw(E).

Proceed to connect wires:

**GROUNDING INSTRUCTIONSSTEP 1:** Insert the green grounding screw into the hole with two raised dimples on the circular strap. Wrap the ground wire from the fixture (if supplied) around the green grounding screw, then connect it to ground wire from the outlet box (if not fixed on the outlet box) using a wire connector (not supplied). If ground wire from the fixture is not supplied, wrap the ground wire (if not fixed on the outlet box) from the outlet box around the green grounding screw and tighten it.

# **STEP1**: Fix both ends of the mounting plate(L) on the ceiling with self-tapping screws(K)not included).

# FINAL ASSEMBLY

**SSTEP1:** Add a section of bridge wire for every 4 lamp holders, Connect the black wire with connector, Connect the white wire with connector, Complete the wiring in sequence.

**STEP2** Hangs tight on composite mount plate (L), Then put the lead wires of the lamps according to the color, Connect the black wire with connector; Connect the white wire with connector; **STEP3**: After wires are connected, tuck them carefully inside outlet box.

**STEP4**: Securing the Ceiling plate(I) to the mounting plate (L) with screw(J).


#### **CLEANING**

To clean wipe fixture with a soft cloth. Clean glass with a mild soap. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

### ORDERING PARTS

Keep this sheet for future reference, and in case you need to order replacement parts. All parts for this fixture can be ordered from place of purchase. Be sure to use exact wording from illustration when ordering parts.

Line art shown may not exactly match the fixture enclosed. However, the installations do apply to this fixture. ITEM NO: CP5407L

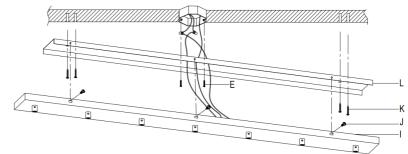

# **NEVER CONNECT GROUND WIRE TO BLACK OR WHITE**

GROUP A: Connect to Black	GROUP B: Connect to White
House Wire	House Wire
BLACK	WHITE
*PARALLEL WIRE (round &	*PARALLEL WIRE (square &
smooth)	ridged)
WHITE OR GREY WITH	WHITE OR GREY
TRACER	WITHOUT TRACER
BROWNGOLDOR	BROWN, GOLD OR BLACK
BLACK WITHOUT TRACER	WITH TRACER

POWER SUPPLY WIRES.