

1500 Cherokee Parkway, Suite 100, Acworth, GA 30102

Phone: (866) 845-5451 • Fax: (866) 816-6165

E: service@acclaim-lighting.com • www.acclaim-lighting.com

IN21192 INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor. Min 90°C supply conductors.

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL


All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

- 1. Connect the stems (16)(15)(14)(13) one by one, then attach them into the socket cup (17) and thread the stem into the swivel (11).
- 2. Remove the set screw (18) from the socket cup (17), then place the glass (19) into socket cup (17) and secure with set screws (18) one by one.
- 3. Thread two machine screws (5) to the mounting bar (7) and secure with the hex nuts (9).
- 4. Secure the mounting bar (7) with mounting screws (10) to the outlet box (1).
- 5. Pull out the outlet wire and ground wire from the outlet box (1). Make wire connections.
- --Ribbed wire (w/o marking) from light to White wire (2) from power source.
- --Smooth wire (w/o marking) from light to Black wire (3) from power source.
- --Loop the ground wire (4) to mounting bar (7) with a ground screw(8).
- 6. Attach the fixture canopy to the outlet box (1), secure with the ball nut (12)
- 7. Install bulbs: (bulb not included)

(Please don't exceed the maximum capacity that's recommended on the sockets).

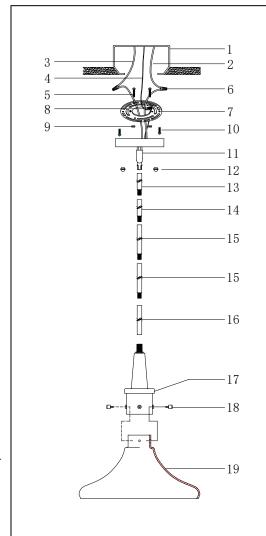

- 1. OUTLET BOX
- 2. WHITE WIRE
- 3. BLACK WIRE
- 4. GROUND WIRE
- 5. MACHINE SCREW
- 6. WIRE CONNECTOR
- 7. MOUNTING BAR
- 8. GROUND SCREW
- 9. HEX NUT
- 10. MOUNTING SCREW
- 11. SWIVEL
- 12 BALL NUT
- 13. STEM
- 14. STEM
- 15. STEM
- 16. STEM
- 17. SOCKET CUP
- 18. SET SCREW
- 19. GLASS