


CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS




Crystoramaom

ASSEMBLY INSTRUCTION MODEL # 565-CT

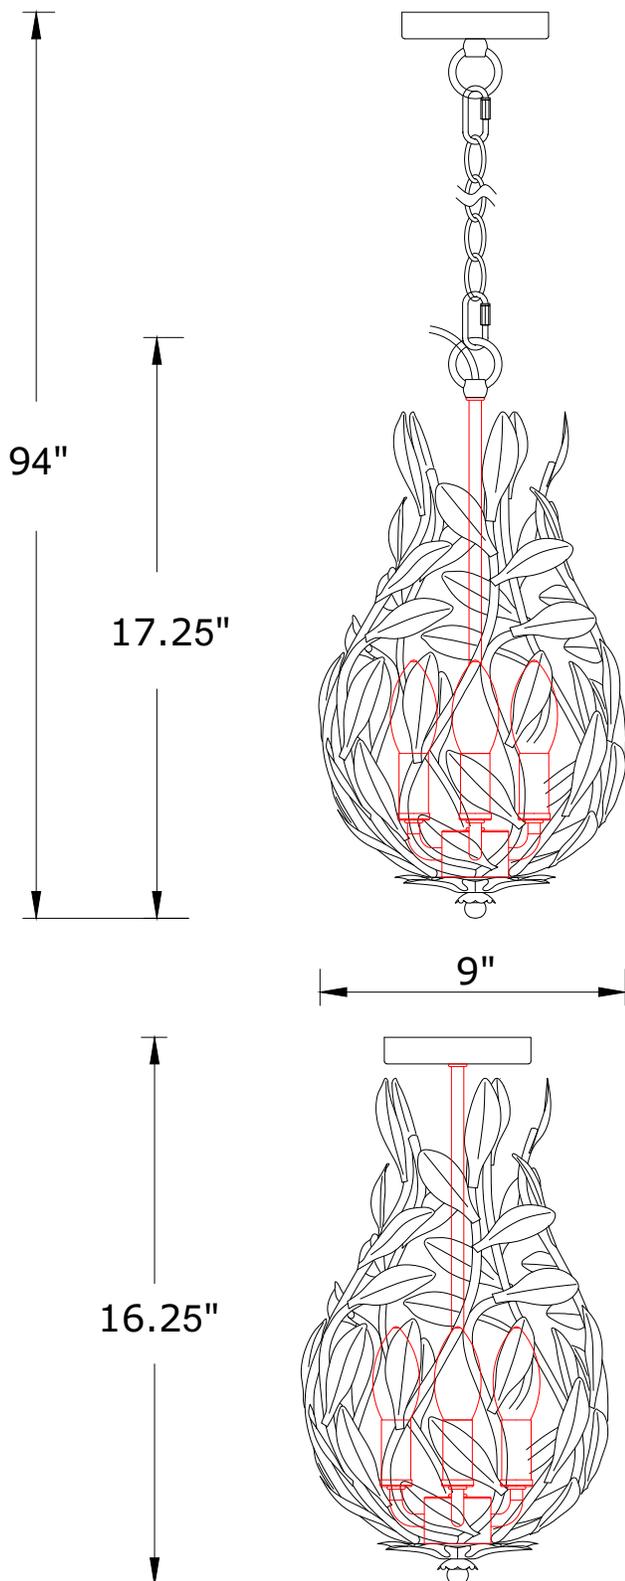

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 3 -Candelabra Base Bulb
40 Watts Recommended 60 Watts Max.
USE LED BULBS FOR EXTENDED USE
THIS FIXTURE IS DAMP RATED

How to Install

For Hanging:

1. Attach the mounting strap onto the outlet box.
2. Decide the preferred hanging height and choose the correct length of chain needed.
3. Attach the fixture loop onto the center stem.
4. Hook one end of the chain onto the fixture loop and the other end onto the loop under the canopy.
5. Raise the fixture up onto the ceiling and do the wire connection. Secure the canopy over the outlet box with screw.
6. Move the stem with a sticker to install the bulb and then move it back.

For Ceiling:

1. Remove the fixture loop from the center stem.
2. Remove the loop from the canopy.
2. Place the canopy over the center stem and secure with the washer and hex nut.

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer

How to change the bulb:

Move the stem with a sticker to replace the bulb.






and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov.

CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



PART NUMBER MODEL # 565-CT

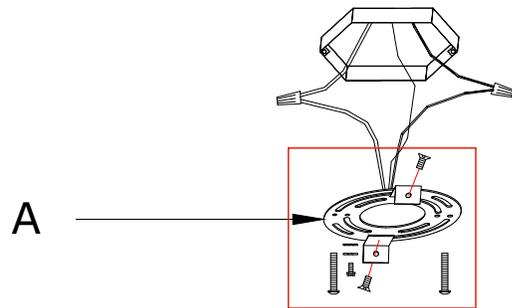

sticker on one of stems

Part Number

- A. (1) - Mounting Hardware
- B. (1) - Canopy(W4.3",H0.79") #XRE565CTCAN4.3IN
- C. (2) - Quick Link
- D. (1) - Hanging Chain(72",3.2mm) #XRE565CTCHA3.2MM
- E. (1) - Fixture Loop
- F. (3) - Candle sleeve(W0.87",H1.97") #XRE566CTCDL1.97IN
- G. (1) - Metal dish
- H. (1) - Finial #XRE565CTFIN

