


# CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



Crystorama.com

## ASSEMBLY INSTRUCTION MODEL # 565-MT

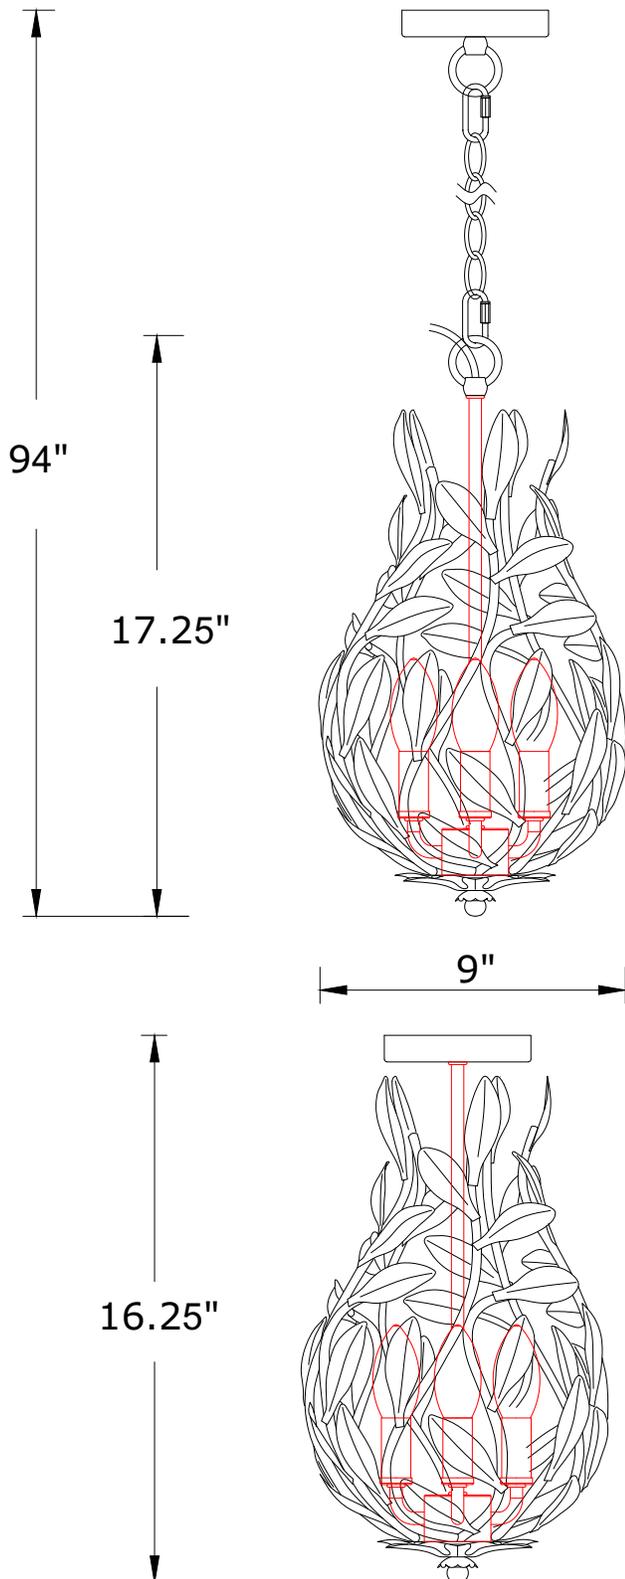

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 3 -Candelabra Base Bulb  
40 Watts Recommended 60 Watts Max.  
USE LED BULBS FOR EXTENDED USE  
THIS FIXTURE IS DAMP RATED

### How to Install

#### For Hanging:

1. Attach the mounting strap onto the outlet box.
2. Decide the preferred hanging height and choose the correct length of chain needed.
3. Attach the fixture loop onto the center stem.
4. Hook one end of the chain onto the fixture loop and the other end onto the loop under the canopy.
5. Raise the fixture up onto the ceiling and do the wire connection. Secure the canopy over the outlet box with screw.
6. Move the stem with a sticker to install the bulb and then move it back.

#### For Ceiling:

1. Remove the fixture loop from the center stem.
2. Remove the loop from the canopy.
3. Place the canopy over the center stem and secure with the washer and hex nut.

#### How to change the bulb:

Move the stem with a sticker to replace the bulb.


**WARNING:** This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

# CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



PART NUMBER MODEL # 565-MT

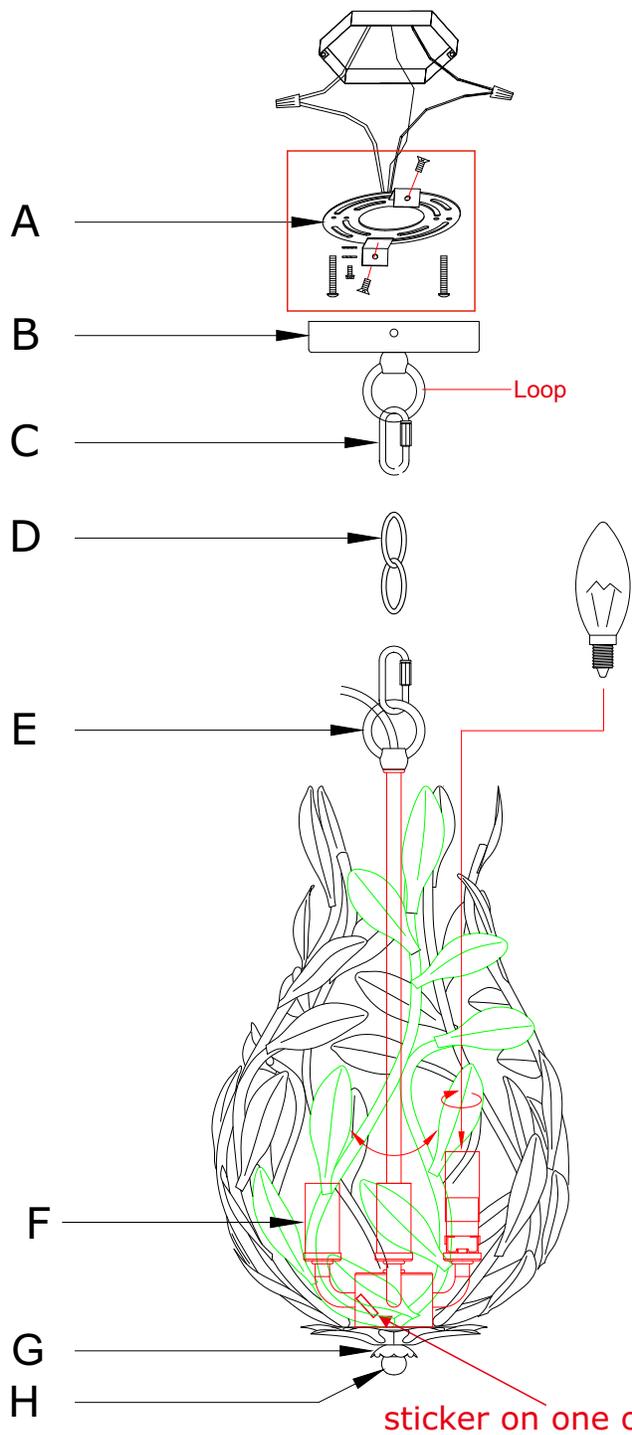

## Part Number

- A. (1) - Mounting Hardware
- B. (1) - Canopy(W4.3",H0.79") #XRE565MTCAN4.3IN
- C. (2) - Quick Link
- D. (1) - Hanging Chain(72",3.2mm) #XRE565MTCHA3.2MM
- E. (2) - Loop
- F. (3) - Candle sleeve(W0.87",H1.97") #XRE514MTCDL1.97IN
- G. (1) - Metal dish
- H. (1) - Finial #XRE565MTFIN

