


CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



Crystorama.com

ASSEMBLY INSTRUCTION MODEL # 565-SA_CEILING

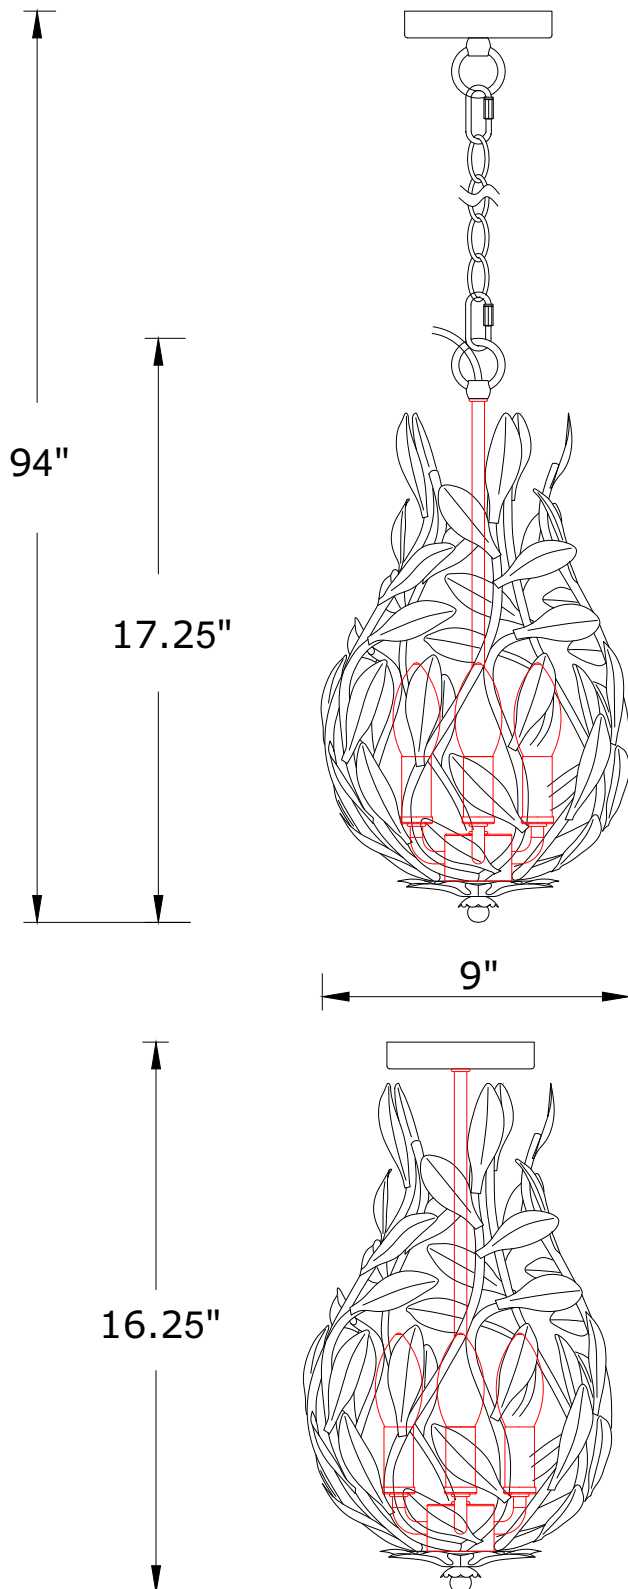

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 3 -Candelabra Base Bulb

40 Watts Recommended 60 Watts Max.

USE LED BULBS FOR EXTENDED USE

THIS FIXTURE IS DAMP RATED

How to Install

For Hanging:

1. Attach the mounting strap onto the outlet box.
2. Decide the preferred hanging height and choose the correct length of chain needed.
3. Hook one end of the chain onto the fixture loop and the other end onto the loop under the canopy.
4. Raise the fixture up onto the ceiling and do the wire connection. Secure the canopy over the outlet box with screw.
5. Move the stem with a sticker to install the bulb and then move it back.

For Ceiling:

1. Remove the loop from the canopy.
2. Place the canopy over the center stem and secure with the washer and hex nut.


How to change the bulb:

Move the stem with a sticker to replace the bulb.

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov.



PART NUMBER MODEL # 565-SA_CEILING

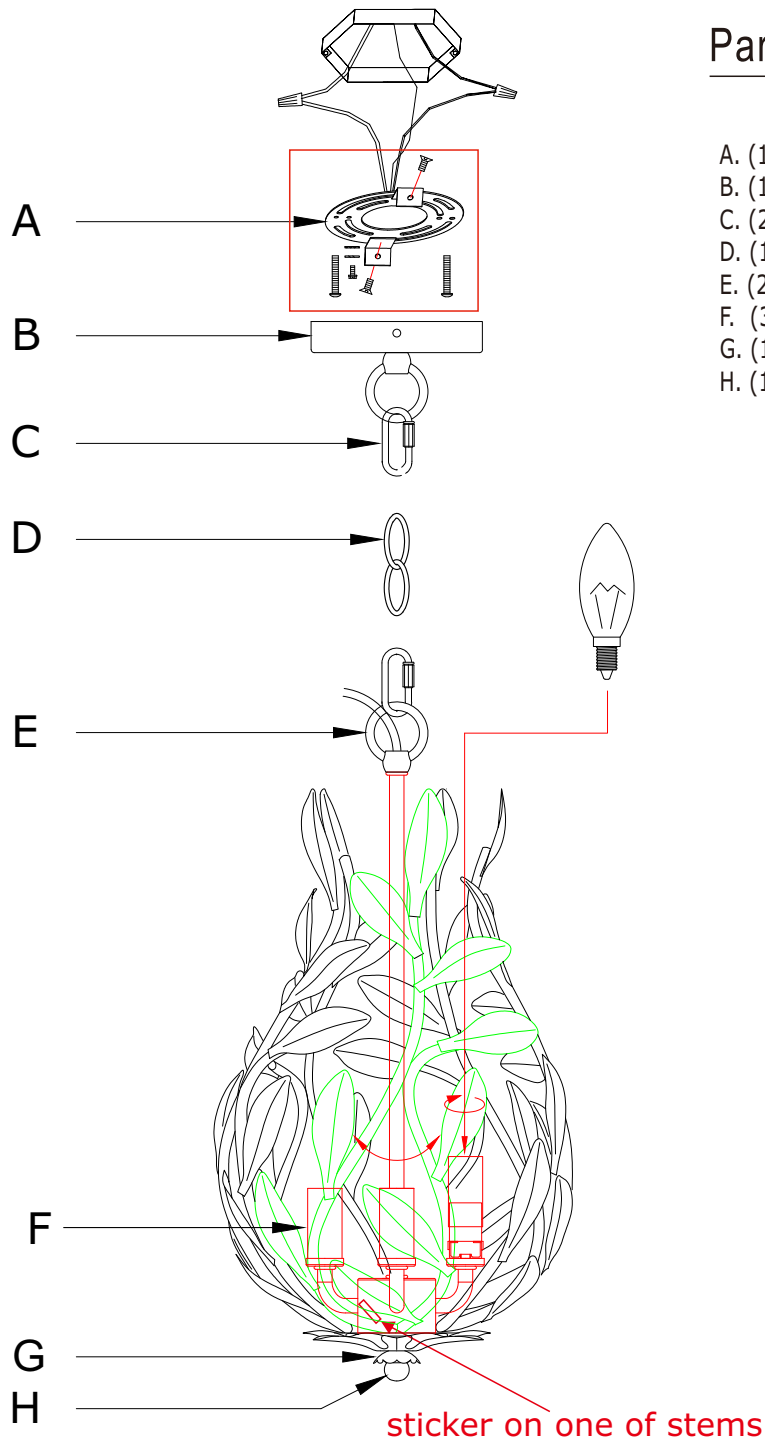

Part Number

- A. (1) - Mounting Hardware
- B. (1) - Canopy(W4.3",H0.79") #XRE565SACAN4.3IN
- C. (2) - Quick Link
- D. (1) - Hanging Chain(72",3.2mm) #XRE565SACHA3.2MM
- E. (2) - Loop
- F. (3) - Candle sleeve(W0.87",H1.97") #XRE514SACDL1.97IN
- G. (1) - Metal dish
- H. (1) - Finial #XRE565SAFIN

