


CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



Crystorama.com

ASSEMBLY INSTRUCTION MODEL # 569-CT

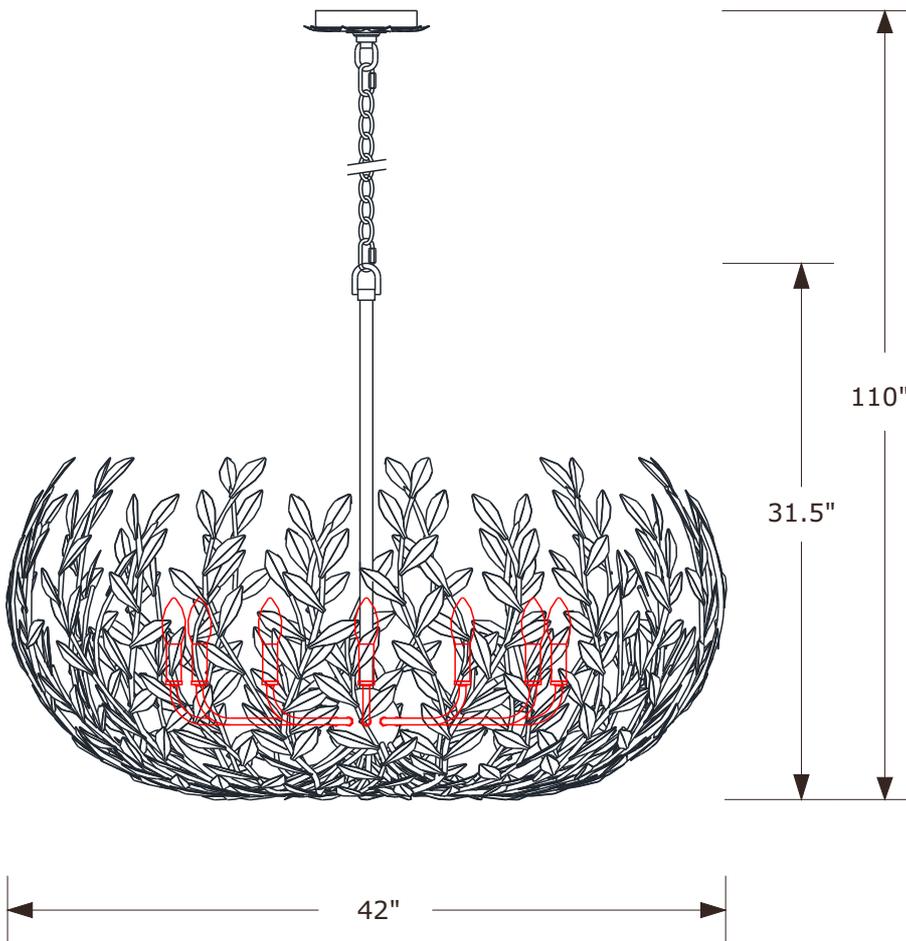

WARNING:




Electrical Danger



Turn Power Off

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 12 -Candelabra Bulb
40 Watts Recommended 60 Watts Max.
USE LED BULBS FOR EXTENDED USE
THIS FIXTURE IS DAMP RATED

How to Install

1. Do a complete inventory of all parts and components before you start installation.
2. Attach the center stem onto the light cluster.
3. Decide the preferred hanging height and choose the correct length of chain needed.
4. Hook one end of the chain onto the fixture loop and the other end onto the screw collar loop.
5. Insert recommended bulbs (not included).
6. Install the canopy onto the outlet box and secure it with the ball nuts.

 **WARNING:** This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov.


CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



Crystorama.com

PART NUMBER MODEL # 569-CT

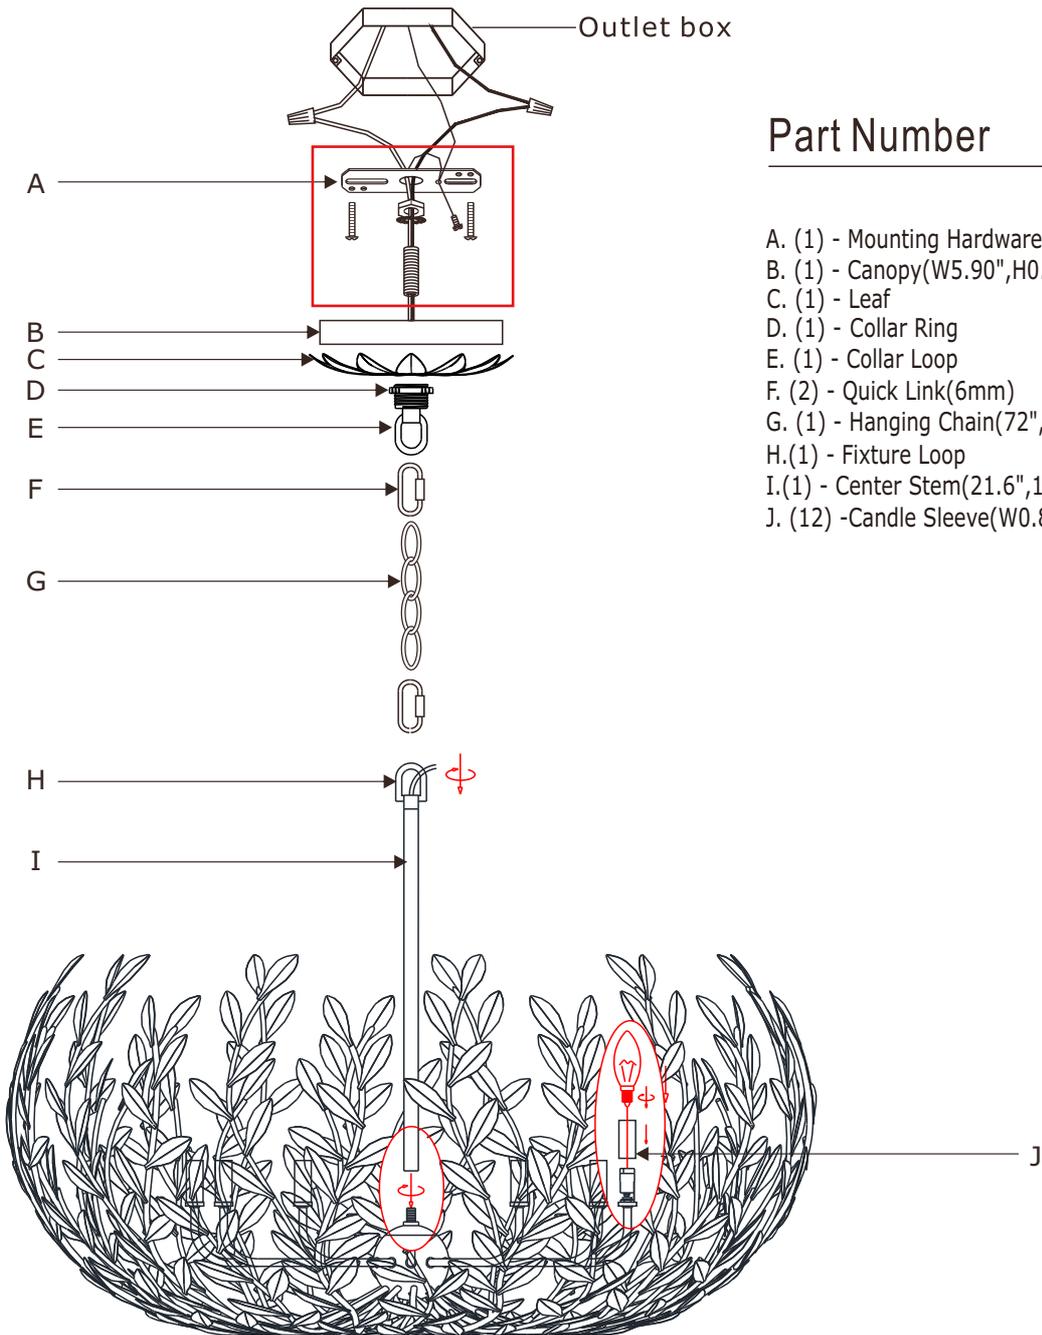

Part Number

- A. (1) - Mounting Hardware
- B. (1) - Canopy(W5.90",H0.98")#XRE569CTCAN5.90IN
- C. (1) - Leaf
- D. (1) - Collar Ring
- E. (1) - Collar Loop
- F. (2) - Quick Link(6mm)
- G. (1) - Hanging Chain(72",5mm) #XRE569CTCHA5MM
- H.(1) - Fixture Loop
- I.(1) - Center Stem(21.6",19mm) #XRE569CTSTEM21.6IN
- J. (12) -Candle Sleeve(W0.87",H1.97") #XRE514CTCDL1.97IN