


CRYSTORAMA LIGHTING



ASSEMBLY INSTRUCTION MODEL# ADD-415-AG-AU

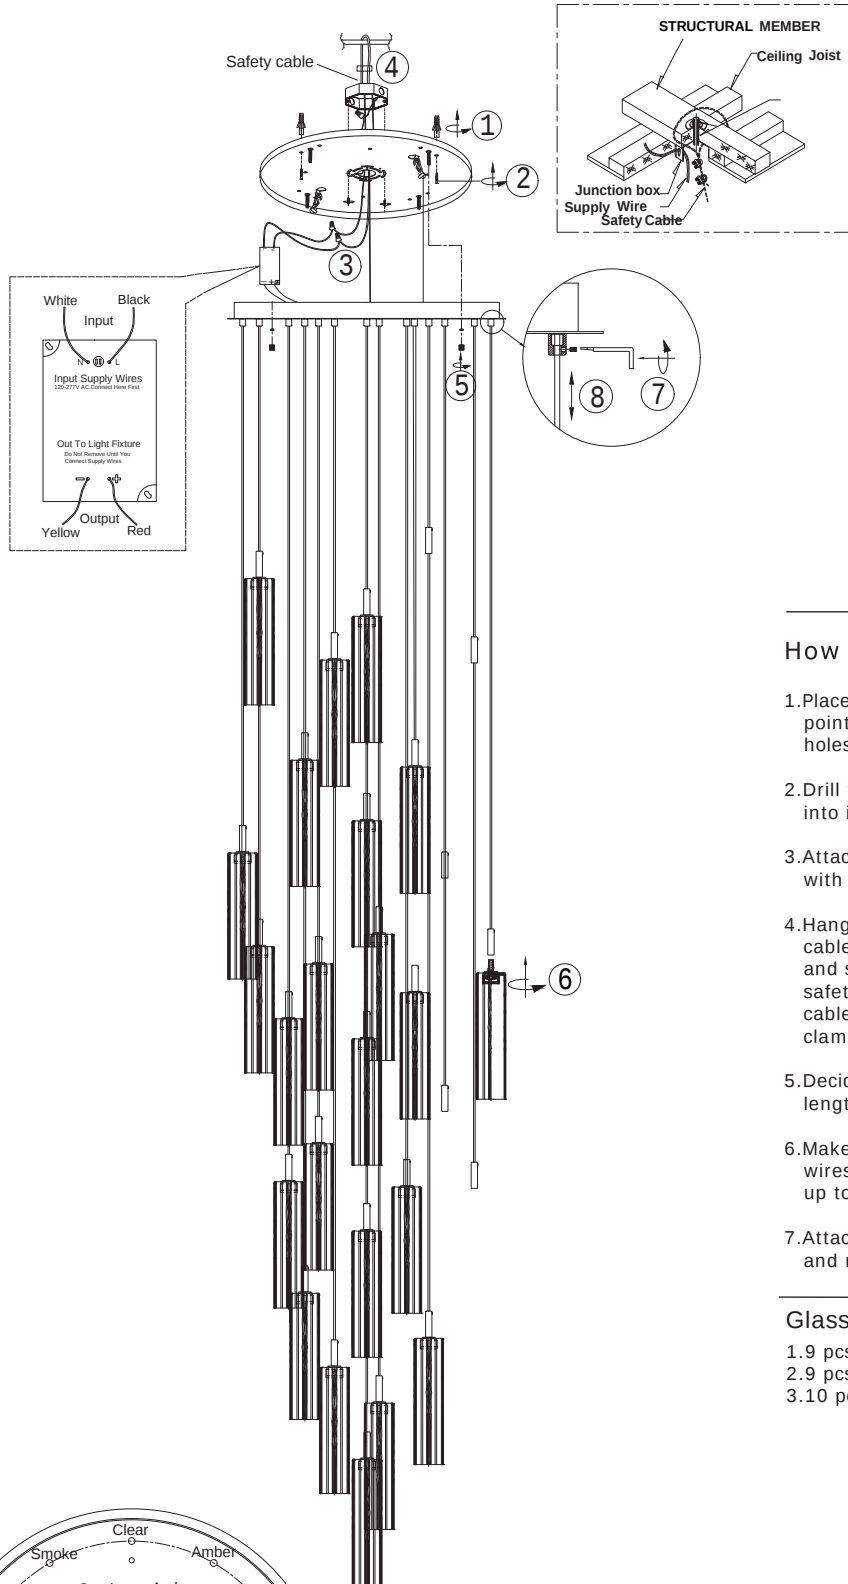

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 28x3 Watts Intergrated LED module (LEDIncluded)


This fixture is Damp rated

How to install

1. Place the mounting plate over the outlet box and mark four points on the ceiling at the same distance as between the holes on the mounting plate.
2. Drill the holes at the marked points and insert the anchors into it.
3. Attach the mounting plate onto the outlet box and secure with the anchor screws.
4. Hang the canopy onto the mounting plate by hooking the cable wire into the slots as shown. Feed the fixtures wires and safety cable through the mounting plate. Run the safety cable through the outlet box and wrap the safety cable around the ceiling joist and secure the cable with the clamp and set up to the ceiling.
5. Decide the preferred hanging height and adjust the desired length of wire needed by loosen the set screw.
6. Make electrical connections from supply wire to fixture lead wires. After the wire connection is made, raise the canopy up to cover the outlet box and secure with the cap nuts.
7. Attach the glass shades up into the plug at the end of wire, and rotate it to tighten clockwise.

Glass Sets

1.9 pcs	Clear Glass(D2.75 x H12")
2.9 pcs	Smoke Glass(D2.75 x H12")
3.10 pcs	Amber Glass(D2.75 x H12")

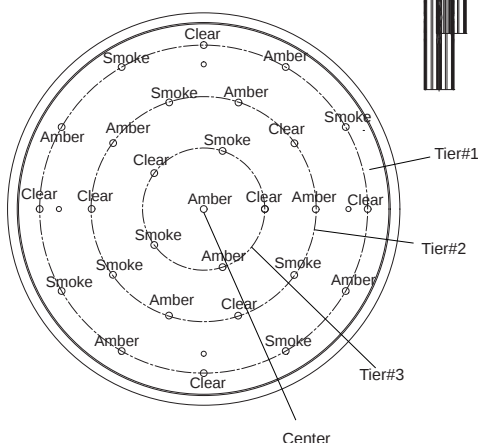


WARNING: This product can expose you to Lead which is known to the state of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

CRYSTORAMA LIGHTING




ASSEMBLY INSTRUCTION MODEL # ADD-415-AG-AU

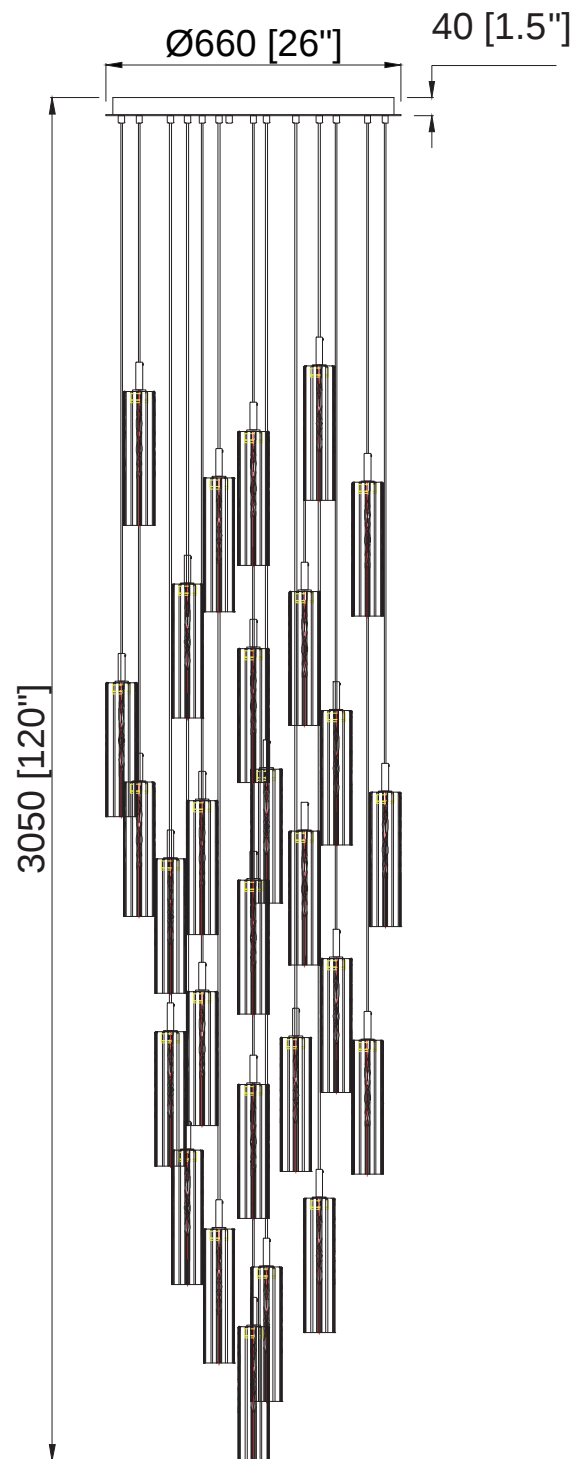

 **WARNING:** This product can expose you to Lead which is known to the state of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

Part Number

Part Numbers

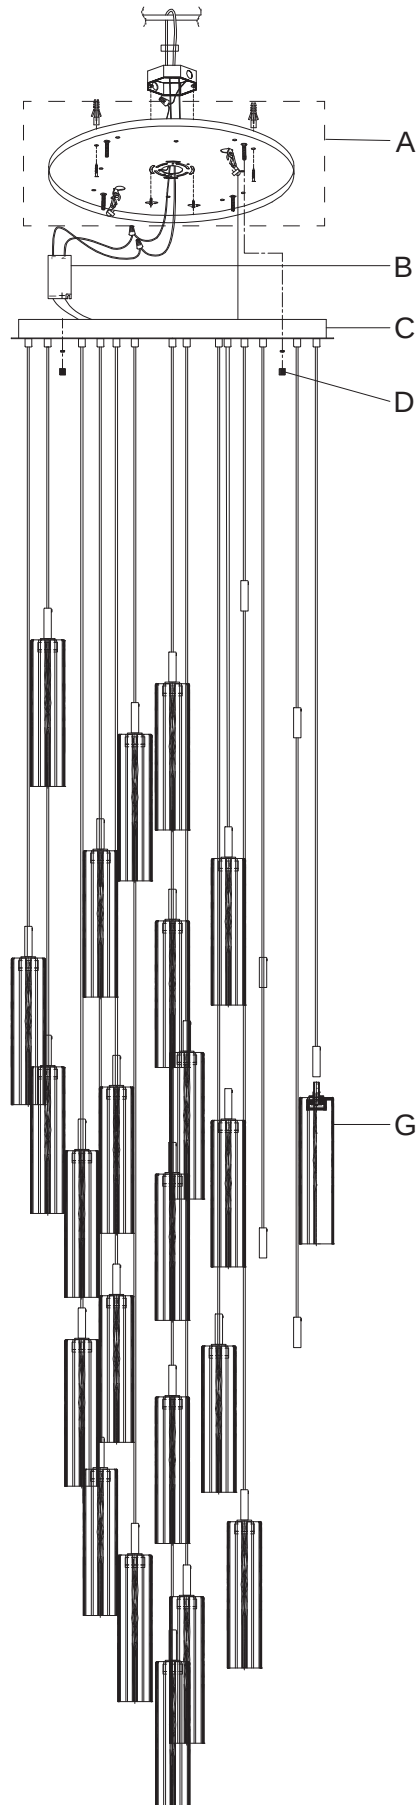

- A. Mounting hardware includes
 - (4)-Mounting screws
 - (1)-Mounting plate
 - (4)-Hex.nuts
 - (4)-Wood screws
 - (4)-Plastic anchors
- B. (1)-LED driver
- C. (1)-Canopy,D26 x H1.5"
- D. (4)-Cap nuts
- E. (9)-Clear glass(D2.75 x H12")
 - (10)-Smoke glass(D2.75 x H12")
 - (9)-Amber glass(D2.75 x H12")