







CRYSTORAMA LIGHTING



ASSEMBLY INSTRUCTION MODEL # PAL-526-GA

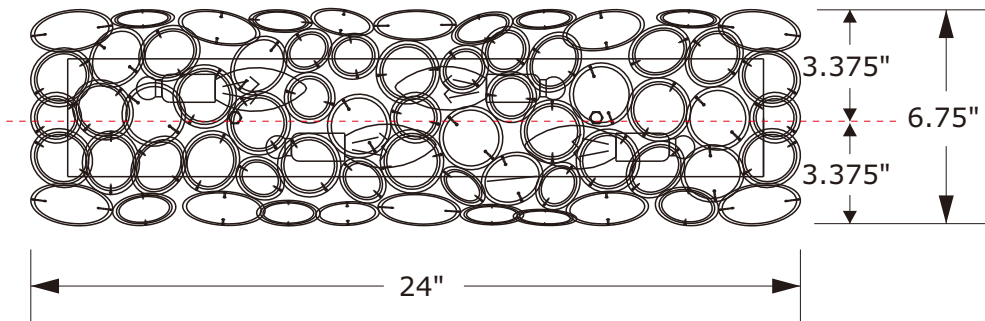

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 4-Candelabra Base Bulb

40 Watts Recommended 60 Watts Max.

USE LED BULBS FOR EXTENDED USE

THIS FIXTURE IS DAMP RATED.

How to install

- 1.Remove the frame by unscrewing the nuts on top of the backplate.
- 2.Insert recommended bulbs (not included) onto the socket.
- 3.Put the mounting plate over the outlet box and mark two points on the wall at the center of key holes.
- 4.Drill the holes at the marked points and insert the wall anchor inside the hole drilled.
- 5.Place the mounting plate over the outlet box and secure it with the machine screws. Insert the wall anchor screws inside the wall anchors in the wall and tighten it.
- 6.Secure the frame onto the backplate by screwing the nuts.

Capiz Shell Sets

A.31 Pieces 30mm

B.31 Pieces 40mm

B.17 Pieces 55mm

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov.

PART NUMBER MODEL # PAL-526-GA

Part Number

- A. (1) - Mounting Hardware
- B. (2) - Ball Nut1
- C. (2) - Hex Nut
- D. (1) - Backplate(L22.91",H4.72",D0.79")
#XRE526GABKP23IN
- E. (2) - Ball Nut2
- F. (1) - Frame

