

INSTALLATION INSTRUCTIONS

Item#P8080-615 (New. 02/28/2015)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture including the mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.

SUGGESTED INSTALLATION (Fig. 1)

3. Determine the desired hanging height and thread rods (F1, F2 and F3) to nipple (I) of socket cup (G). Attach canopy (D) by screwing onto rod (F1). Carefully pass the wires through each rod during assembly. Note: remove the nipple if installing with one 6" rod only.
4. Attach circular strap (A) to the outlet box using mounting screws (B) (Size: #8-32N*L0.5"). The side of the circular strap marked "GND" must face out.
5. Thread studs (C) into the pre-drilled holes in circular strap (A) spaced the same distance apart as the holes in canopy (D). The length of studs (C) into circular strap (A) may be adjusted if necessary.

CONNECTING THE WIRES (Fig. 2)

6. At this point, connect the electrical wires as shown in figure 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap using the green screw provided.
7. Tuck the wire connectors neatly into the ceiling junction box.

COMPLETING THE INSTALLATION (Fig. 1)

8. Align canopy (D) to studs (C) and secure with cap nuts (E).
9. Align cloth shade (H) onto the socket and secure with socket ring (I).
10. Install the light bulb(s) (J) (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Fig. 1


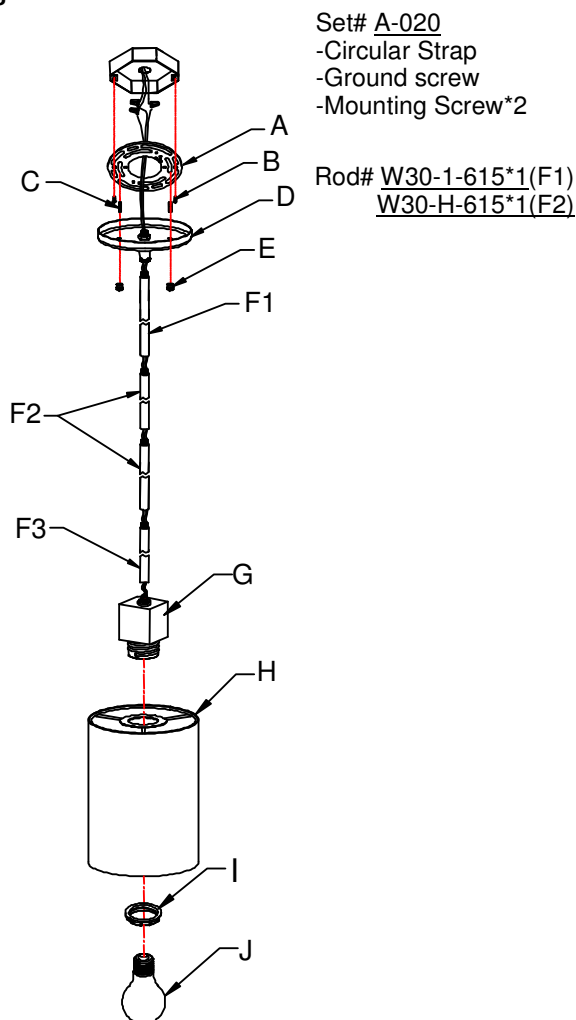


Fig.2

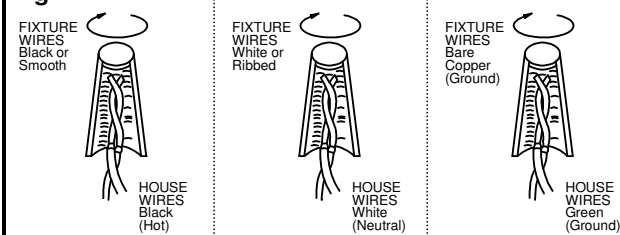

LA-2431E