

GENERAL PRODUCT INFORMATION:

This product is suitable for damp locations.

These fixtures are intended to be installed utilizing NEC compliant junction boxes.




This product can be dimmed with a LED or TRIAC dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

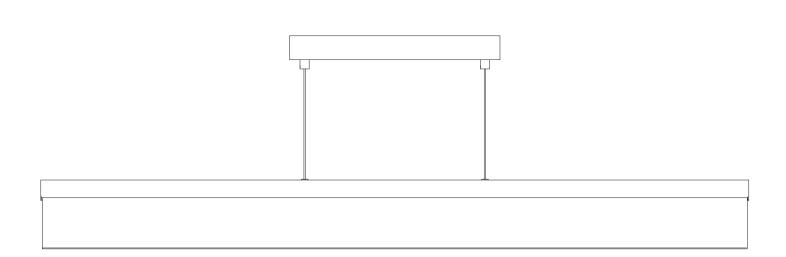

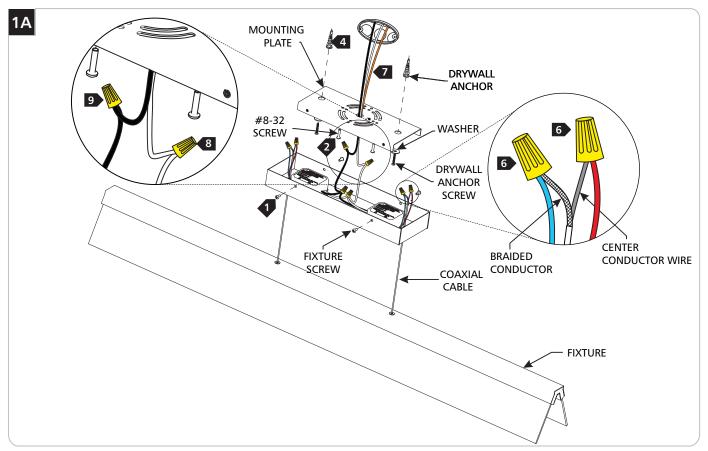

- Remove the fixture screws located on the sides of the canopy using a screw driver, then remove the mounting plate from the canopy.
- 2 Temporarily install the mounting plate onto the electrical box with the two #8-32 screws provided.
- Mark the location of the drywall anchors. Then remove the mounting plate.
- Tap the drywall anchors into the drywall at the marked locations.
- Reinstall the mounting plate and screw the anchor screws into place using the provided screws and washers.
- Adjust the height (Optional): Shorten the coaxial cables to the desired length by loosening the strain relief and pulling the cables into the canopy. Either coil the coaxial cable into the canopy or remove the excess cable. If triming the excess; the outer braiding is connected to the blue wire and the inner conductor is connected to the red wire. Each coaxial cable should only be connected to one driver.
- Connect the fixture to suitable ground in accordance with local electrical codes.
- 8 Connect the white fixture wires to the neutral power line wire with a wire nut.
- 9 Connect the black fixture wires to the hot power line wire with a wire nut.
- 10 Properly place all wires and wire nut connections into the canopy, mount the fixture back onto the mounting plate, and reinstall fixture screws (reversal of step 1).

SAVE THESE INSTRUCTIONS!



7400 Linder Ave, Skokie, IL 60077 847.410.4400

www.techlighting.com

© 2017 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company