
## Model: H/L/J-LED202

### **AC LED Track Luminaire**

# WAC LIGHTING

### Responsible Lighting®

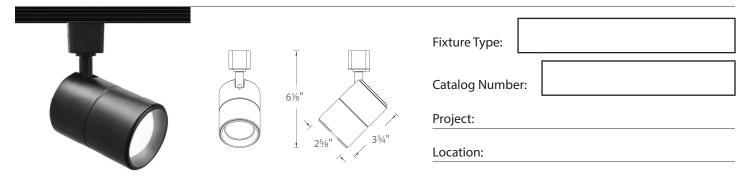

#### PRODUCT DESCRIPTION

LED202 track luminaire offers driverless AC LED technology and easy change of beam angles in field. Superior light output in a small, unobtrusive design. The high output LEDs outperform halogen 50W MR16. Developed for upscale residential and commercial environments.

#### **FEATURES**

- · Driverless AC LED technology
- · Compact integrated design
- · Easy change of beam angles in field
- Outperforms halogen 50W MR16
- · Consistent high quality beam pattern
- · Accommodates 1 lens accessory
- · 360° horizontal and 90° vertical aiming
- 50,000 hour rated life
- · 5 year WAC Lighting product warranty

#### **SPECIFICATIONS**

Construction: Die-cast aluminum with removable PC lens cap

for easy change of lenses or accessories

Finish: Black (BK) and White (WT) powder coat paint.

**Driver:** Input voltage: 120VAC 50/60Hz. **Light Source:** High Voltage AC LED module.

**Dimming:** Dims to 10%-100% with electronic low voltage (ELV)

dimmer. Compatible with LUTRON SELV-300P,

DVELV-300P and LEVITON MLE03-1.

Standards: ETL & cETL Listed. Energy Star Rated.

#### **BEAMSHIFT™TECHNOLOGY**

LED202 track luminaires come with BeamShift  $^{\text{TM}}$ , allowing in-field change of beam angle simply by changing the location of the lens with a simple flat-head screwdriver.






Convex Lens located in front of the spacer.

Front Baffle



### ORDER NUMBER

Track System	Model	Finish	Voltage	Color Temp	Power	CRI	Beam	Lumens	Efficacy
H H Track	LED202-30	<b>BK</b> Black	( 1201/	2000/	1.514/	0.5	25°	540	36 Lm/W
L L Track J J/J2 Track		WT White	120V	3000K	15W	85	40°	660	44 Lm/W



Example: **H-LED202-30-WT** 

# LENSES & ACCESSORIES

Model		Color	
		AMB	Amber
		BLU	Blue
LENS-16	Color Lens	GRN	Green
		RED	Red
		YEL	Yellow

FINISHES		
ВК	WT	

EINICHEC

WAC Lighting www.waclighting.com Phone (800) 526.2588 • Fax (800) 526.2585 **Headquarters/Eastern Distribution Center**44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

**Western Distribution Center** 1750 Archibald Avenue • Ontario, CA 91760 Phone (800) 526.2588 • Fax (800) 526.2585

### Model: H/L/J-LED202

### **AC LED Track Luminaire**



Responsible Lighting®

### **APPLICATION PERFORMANCE – 3000**K



0° Aiming Angle (ceiling to floor)

LED202-30
25° haam

LE	D2	02-	3
4	0° h	ea	m

	-	25 Dean	ı
Distance	FC	L	W
4 ft	75	1.8	1.8
6 ft	33	2.7	2.7
8 ft	19	3.5	3.5
10 ft	12	4.4	4.4

**FC** 26

12

7

40° beam						
FC	L	W				
60	2.9	2.9				
27	4.4	4.4				
15	5.8	5.8				
10	7.3	7.3				



4 ft

6 ft

8 ft

10 ft

Distance

45° Aiming Angle (ceiling to wall)

LED202-30

w

2.5

3.8

5.0

6.3

LE	D	20	02	2-	3	(
	-					

25°	beam

3.7

5.6

7.5

9.3

TO OCUITI						
FC	L	W				
21	6.7	4.1				
9	10.1	6.2				
5	13.4	8.2				
3	16.8	10.3				

#### **PHOTOMETRY**

