Assembly Instruction Sheet #IS-0415P7-1-101 For Style 0415P7-1-101

⊤OF Style 0415P7-1-101 Fook Required: Flathead screwdriver, Phillips screwdriver, pilers, wire cutters, wire strippers, electrical tape, safety glasses

Light Source: (1) E26 Base Bulb 60W Maximum(Not include).


Estimated Assembly Time: 15-30 minutes


Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement

№ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture.


We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

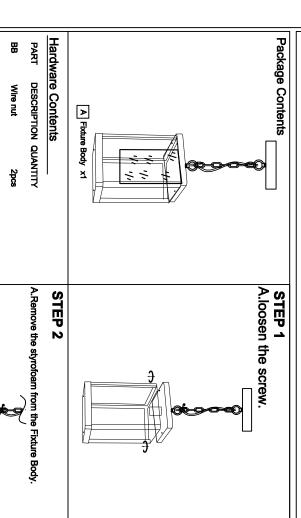



STEP 4

A.Lock the screw.



႘

Outlet Box Screw

2pcs

• 8

1 of 2

ReleasedDate:2018-04-13