

Assembly Instruction Sheet #IS-1094P47 For Style 1094P47


Tools Required: Flathead screwdriver, Pliers screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.
Light Source: (10) G9 G94W Incandescent/LED Incandescent.
Estimated Assembly Time: 30-45 minutes.
Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams later to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents

- D** Middle Rod
- D1** 4" x 1/4" 2pcs
- D2** 6" x 2pcs
- D3** 12" x 10pcs



A Fixture Body x1

E Ceiling Canopy x1



B Tree Arms x10

G Glass drop x120

PART	DESCRIPTION	QUANTITY
BB	Wire nut	2pcs
CC	Screw	2pcs



STEP 1 - Release Crossbar from Ceiling Canopy.




Figure 1

STEP 2 - Install Rods, Ceiling Canopy to Fixture Body.

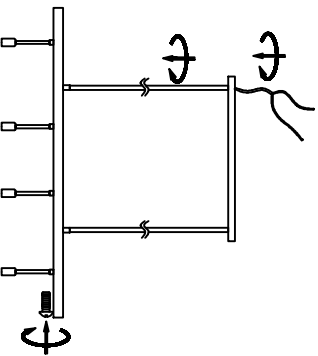


Figure 2

STEP 3 - Attach Mounting bracket to Outlet Box

A. Pass the supply wires through the Mounting bracket (EE) to the Outlet Box. Attach the Mounting bracket (EE) to the Outlet Box with the head of the Green Ground Screw (CC). Secure it with Outlet Box Screws (CC). Tighten until snug.

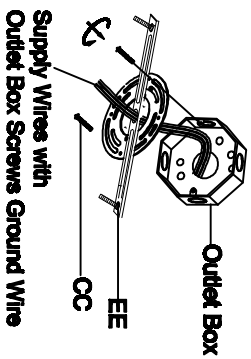


Figure 3

STEP 4 - Wire Connections

A. Use standard wire connectors to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

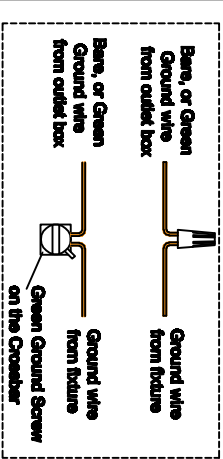
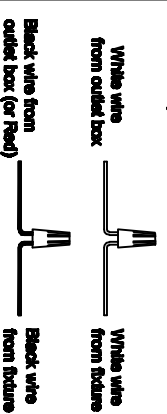


Figure 4

STEP 5 - Install Ceiling Canopy to Ceiling

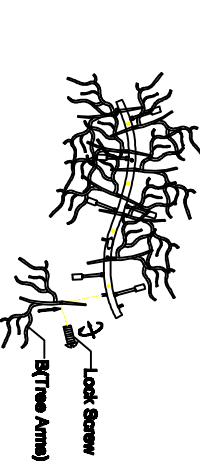
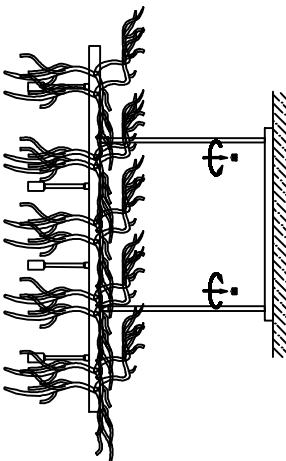


Figure 5

STEP 6 - Install Glass drop and Bulbs.

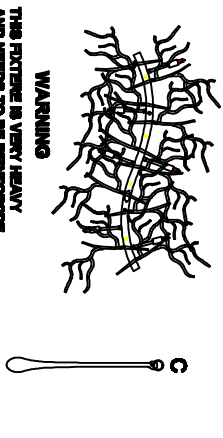
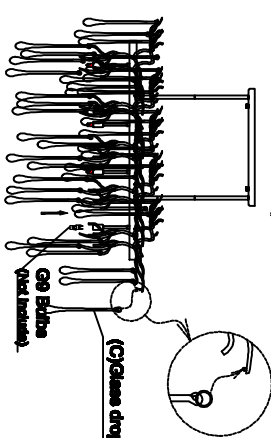


Figure 6

WARNING
 THIS FIXTURE IS VERY HEAVY
 AND NEEDS TO BE REINFORCED
 ACCORDINGLY.

120PCS