


95 Cantiague Rock Road Westbury, NY 11590 Phone: (516) 931-9090 Fax: (516) 931-1254


5661



FRONT VIEW

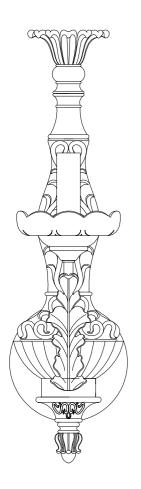

You will need 1-Candelabra Bulb 60 Watts Max Bulb not included.

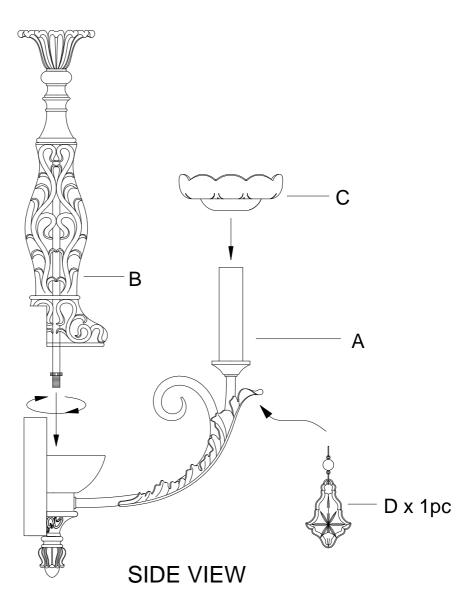


ASSEMBLY STEPS:

- 1). B → A
- 2). C——— A
- 3). D → A



95 Cantiague Rock Road Westbury, NY 11590 Phone: (516) 931-9090 Fax: (516) 931-1254

STANDARD MOUNTING PLATE INSTALLATION INSTRUCTIONS

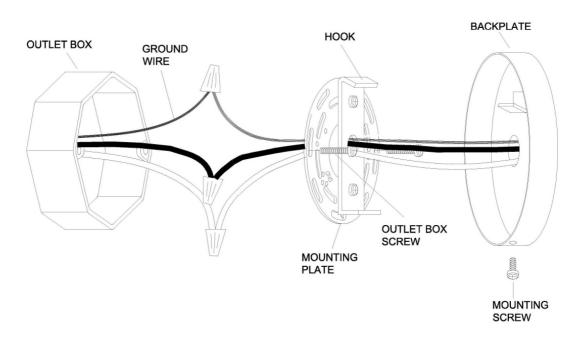

CAUTION: DISCONNECT POWER DURING INSTALLATION

- 1). If you are replacing an existing fixture, disconnect and remove the old fixture. Expose the supply wiring from the outlet box.
- 2). Grounding instructions:
 - A) On fixture where mounting plate is provided with a green ground screw and two raised dimples. Wrap ground wire from the outlet box around green ground screw and tighten.
 - B) On fixture where mounting plate is provided with a green ground wire attached. Connect mounting plate ground wire to ground wire from the outlet box with wire connector.

If fixture is provided with ground wire, connect fixture ground wire to ground wire from the outlet box with wire connector after following the above steps.

Never connect ground wire to black or white power supply wires.

- 3). To make electrical connections: Connect the white wire(s) from the fixture to the white wire of the outlet box; Connect the black wire(s) from the fixture to the black wire of the outlet box. **Note: Black outlet box wire may be red, round & smooth. White outlet box wire may be square & ridged.**
- 4). Tuck all wires into junction box, and be sure no wire strands are exposed.
- 5). Fasten the mounting plate to the outlet box, and secure with 2 outlet box screws.
- 6). Attach the fixture to the hook of the mounting plate aligning mounting hole of backplate with mounting hole of mounting plate, and secure with mounting screw.