



# MGRP20

MODULAR DOUBLE GIMBAL – PAR20  
LINE VOLTAGE REMODEL RECESSED FIXTURES

Type	
Project	
Catalog No.	



## DESCRIPTION

This remodel recessed fixture is comprised of separate housing and trim. This design allows for use in ceilings of different thicknesses up to 2". The PAR20 lamps mean that no transformer is required, which makes dimming infinitely easier for both halogen and LED applications. This fixture is ideal for retail, commercial, and hospitality general or accent lighting.

## FEATURES

- 3/4" overlap flanges, along with "pull-tight" torsions springs allow for minor cutting errors in the ceiling
- Self-resetting thermal protector ensures that fixture is deactivated in case of overheating.
- Double-gimbal construction ensures that lamps can be aimed at virtually any point below the ceiling.
- Aiming – Inner Gimbal: 40°, Outer Gimbal: 45°
- Fits up to 2" ceiling depth

## SPECIFICATIONS

### HOUSING:

The housing is constructed out of a heavy gauge cold rolled steel and powder coated to ensure corrosion resistance,

### JUNCTION BOX:

- Junction box is listed for thru branch circuit wiring (Max of 8 #12 AWG 90°C branch circuit conductors)
- A variety of different sized knockouts provide for different wiring options.

### MOUNTING:

Designed to be installed with overlap flange trim. Non-IC means 3" clearance from any insulation on all sides must be maintained.

### LAMPING:

Use Maximum 120V 50W medium base PAR20 Lamp (Lamps not included). See JESCO's 120V PAR20 LED lamps for an energy-saving substitution.

### CERTIFICATIONS:

UL & CUL Listed. For non-IC applications in dry or damp locations.


## ORDERING INFORMATION

MODEL	LAMP BASE / WATTAGE	# OF LAMPS	FINISH
MGR	P20	-	
	P20 – 120V PAR20 Lamp	1 – 1 Light 2 – 2 Light 3 – 3 Light 4 – 4 Light	WB – White Trim / Black Gimbal / Black Interior SB – Silver Trim / Black Gimbal / Black Interior BB – Black Trim / Black Gimbal / Black Interior (2, 3, 4 Light Only)*

Example: MGRP20-2WB

\*While supplies last

## FIXTURE CONFIGURATIONS

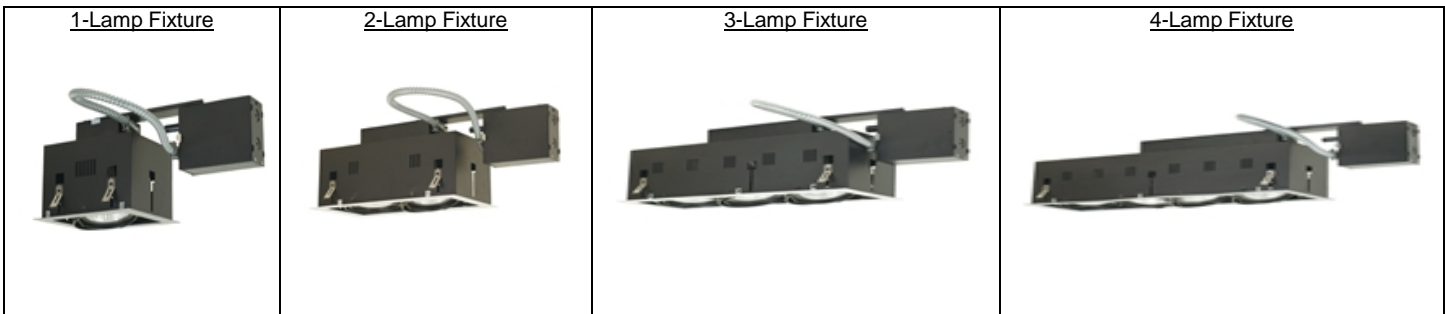

www.jescolighting.com  
support@jescolighting.com  
Tech Support: 855.592.0029

15 Harbor Park Drive  
Port Washington, NY 11050  
Main Line: 800.527.7796  
Fax Line: 855.265.5768

219 South 6<sup>th</sup> Ave  
City of Industry, CA 91746  
Main Line: 855.654.0110  
Fax Line: 626.333.2955

Rev 30  
3/10/2016

Specifications subject to change without notice.




# MGRP20

MODULINEAR DOUBLE GIMBAL – PAR20  
LINE VOLTAGE REMODEL RECESSED FIXTURES

Type	
Project	
Catalog No.	

## FIXTURE DIMENSIONS

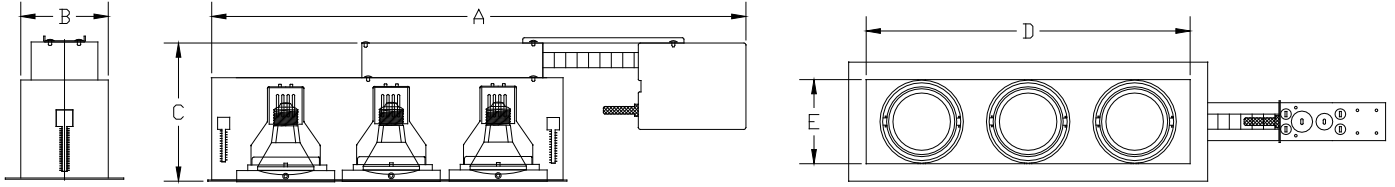

MODEL	HOUSING			APERTURE		CUT-OUT	
	A	B	C	D	E		
MGRP20-1	16-7/8"	5"	7-1/4"	5-3/4"	4-3/8"	7-3/4"	5-1/8"
MGRP20-2	22-3/8"	5"	7-1/4"	11-1/4"	4-3/8"	12-7/8"	5-1/8"
MGRP20-3	27-7/8"	5"	7-1/4"	16-7/8"	4-3/8"	18-3/8"	5-1/8"
MGRP20-4	33-3/8"	5"	7-1/4"	22-3/8"	4-3/8"	23-7/8"	5-1/8"

## ACCESSORIES



**LL-P20-7W-N-2780**  
**LL-P20-7W-M-2780**  
**LL-P20-7W-N-3080**  
**LL-P20-7W-M-3080**  
**LL-P20-7W-N-4080**  
**LL-P20-7W-M-4080**  
 Watt: 7W (65W equivalent)  
 Lumen: 470 Lm