

## ASSEMBLING & INSTALLATION INSTRUCTIONS

The drawing shown may not exactly match the product enclosed. However, the installation instructions do apply to this product.


8467

- **♦ WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**
- ◆ ATTENTION! COUPER LE COURANT AU FUSIBLE OU UN DISJONCTEUR.

## **ASSEMBLING THE FIXTURE (Fig.1)**

- 1. Shut off the power at the fuse box or circuit breaker box. Remove the old fixture from ceiling, including the single bar.
- 2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
- 3. Thread the two studs (A) into the pre-drilled holes in the Single bar spaced the same distance apart as the holes in the fixture (B).
- 4. Attach the Single bar to the Junction Box with the two Junction Box Screws as shown. The side of the Single bar marked "GND" must face out. **The junction box is not included.**
- 5. While holding the fixture (B) assembly towards the ceiling, connect the electrical wires as Shown in Fig.2, making sure that all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise connect fixture's ground wire directly to the Mounting strap with the green screw provided. After wires are connected, tuck them carefully inside the Junction Box.
- 6. Attach the fixture (B) to the junction box, aligning screws on single bar with mounting holes in canopy and lock it securely with the ball nuts(C). Attach the pipe thread (E) to bottom coupling of the fixture (B), lock it securely with the hex nut (D).
- 7. Install the light bulbs (Not included) in accordance with the fixture's specifications. NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!
- 8. Raise glass shade (F) onto the pipe thread of the fixture (B), Thread lock nut (G) onto pipe (E), then attach the cup base (H) and tighten firmly with finial (I).

Your installation is now complete. Return power to the junction box and test the fixture.

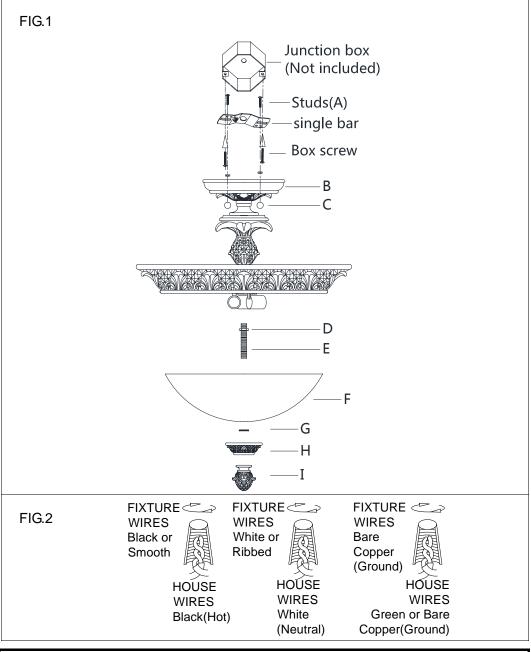

Thank you for purchasing a **LIVEX** product.

Need assistance with parts or assembly? Please call customer service at: 800-761-8056

Or visit us on-line at: WWW.LIVEXLIGHTING.COM