

Infrared Outdoor Patio Heaters Specifications & Safety Features:

Patio Comfort Portable Propane Heaters

Specifications and Safety Features for Models PC-02-W (White), PC-02-JSV (Jet Silver Vein), PC-02-AB (Antique Bronze), PC-02-S (Stainless Steel)

Application: Outdoor Use Only

Coverage:

Varies 10-15 feet diameter from center. Coverage varies by wind conditions, wind chill factor, Level of protection, altitude, and other variables.

Approval: In US -Underwrites Lab's (5.90 5th Edition)

Canadian Standard 1-2.23-MB

Height: Weight: 85 pounds

Finishes: Stainless Steel, White, Jet/Silver Vein, Antique Bronze

BTU Input:

Self-Contained "Piezo"-No Batteries or Electrical Required Ignition:

Reflector: One Piece Anodized Aluminum (34 Inch Diameter)

Heavy Duty Series 403 Stainless Steel Burner: Heavy Duty 430 Stainless Steel Emitter: All 304 or 403 stainless steel Fasteners:

Matching Wheel kit Included in all PC-02 Models Transport:

9 to 10 hours on HI setting-20 LB OPD Cylinder Burn Time: 11.0 Inches W.C.Equipped with MB Sturgis Hose Set/OPD Gas Pressure:

Propane Only Fuel:

100% Safe Shut-Off OPD (Overfill Protection Device) Safety Systems:

Residential One year-Structural Five Years Warranty:

Please Note: Installation must conform to local codes and ordinances Please check with local fire, code,or safety officials if you have any questions as to the suitability, legality, or acceptability of this heating appliance and proper storage of propane cylinders.

Model PC-TT (Table Top)

Specifications and Safety Features for Model PC-TT (Table Top)

36" Tall, Base - 14" Wide, Dimensions:

Reflector:

Heat range:

360 degree radiant circle of heat – 7' diameter. (Will vary based on wind conditions, wind chill factor, prevailing winds, location of heater, wind protection, etc.

BTU Rating: Variable - 7,000 (low) to 11,000 BTU's (high)

Underwriter's Laboratories (UL) Approvals:

Applications: For outdoor use only

Valve/Ignition: Combination LP gas valve with Piezo ignition

Flame Safety: Thermocouple operated gas valve

Oxygen Sensor: Equipped with "ODS" System (Oxygen Depletion Sensor) "Tip-over" switch will shut off unit immediately if unit Tip-Over Sensor:

Operating Time: Two to three hours on standard 16 ounce disposable cylinder

Integrated into valve assembly 11" W.C. Regulator:

Weight: Shipping weight - 15 lbs.

Standard disposable propane cylinder 16.4 ounces (not Supply Cylinder: included) Propane consumption – .30 to .50 lbs per hour

Installation: This appliance is intended for residential (consumer) use only and must be used outdoors in well-ventilated areas only. This

product gets extremely hot and caution should be exercised when using this or any heating or cooking appliance

ONE YEAR - Residential Warranty - No Commercial Warranty Warranty:

Patio Comfort Natural Gas Heaters

Specifications and Safety Features for full sized Natural Gas Heaters Patio Mounted Models NPC-05 AB (Antique Bronze, NPC-05 SS (Stainless Steel). Permanent Post Model NPC-05 SPP (Stainless Steel In Ground NG Post Only)

Application: Portable or Permanently Installed Outdoor Use Only

Varies 10-15 Diameter from Center (coverage varies by wind conditions, wind chill factor, level of protection, altitude, Coverage:

and other variables).

In US- CSA 5.90 5th Edition Approvals:

Canadian Approval 1-2.23-M82

93 Inches

BTU Input:

Weight: 64 Lbs. Patio Base Model 50lbs. Permanent Post Model Finishes Available: Patio Base Units Antique Bronze & Stainless Steel Permanent Post

Model 304 Series Stainless Steel Post Only

Ignition: Piezo Self-Contained- No Batteries or Electrical Required Reflector: One Piece Anodized Aluminum (34 Inch Diameter)

Heavy Duty Series 403 Stainless Steel Burner: Heavy Duty Series 403 Stainless Steel Emitter Grid: Stainless Steel 304 & 403 Series Fasteners

4.5" W.C. Regulated by Maxitrol NG Regulator

Minimum Inlet pressure 6.0 " W.C.

Safety System: 100% Safety Shut Off Fuel Type: Natural Gas Only

Residential -One year-Structural Five Years Warranty:

Installation Kits: NPC05 AB and SS Portable Unit comes with 12 foot AGA Approved Hose Set By "MB Sturgis" with two

"Quick Connect" couplers and solid brass shut off valve. NPC05 SPP Stainless Steel Permanent Post Model Includes feed line braided stainless steel connector hose, brass connections, and shut off valve.

This product is designed for outdoor use only.

Note: Installation must conform to local codes and ordinances.

Patio Comfort Natural Gas Heaters Accessories



Please read and follow all assembly, operating instructions, and warnings to fully enjoy the benefits of your heater and to avoid potential fires, serious injury or death from misuse.

Warning: For use in well ventilated outdoor areas only. Never use inside a home, camper, boat, shelter, tent, vehicle or any other unventilated or enclosed area. This heater (and all outdoor heating and cooking appliances) consumes oxygen and creates deadly carbon monoxide gas which can cause serious injury or death. Never attempt to modify or alter this heater, its controls, or safety

AEI Corporation


"Providing Only The Finest In Leisure Gas Products..... Since 1966"

2641 DuBridge Avenue, Irvine, CA 92606 Phone 949-474-3070 - FAX 949-474-0559 www.patiocomfortheaters.com - aeicorp@sbcglobal.net







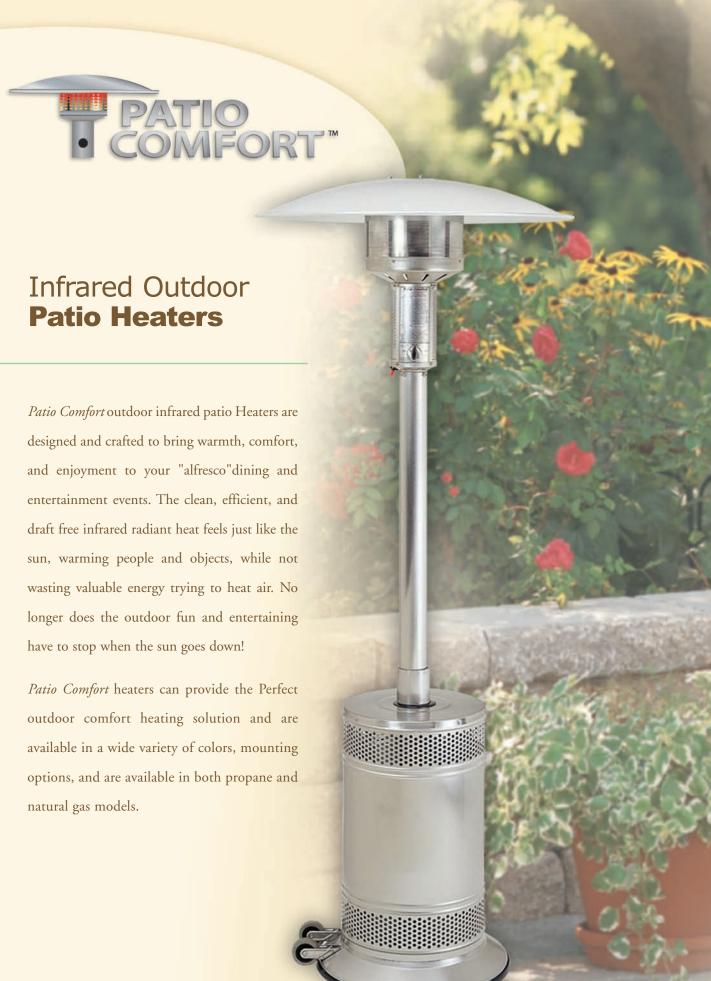



Infrared Outdoor Patio Heaters

- Completely Self-Contained and Portable
- Provides Clean and Draft Free Circle of Warmth
- Convenient "Piezo" Match Free Ignition
- 100% Safety Control
- Oxygen Depletion Sensor (ODS) and Tip
- Switch Safety Systems included on Table Tops
- Portable Wheel Kits Included in Propane Models
- Propane and Natural Gas Models are Available
- Installation kits included on natural Gas Models
- All Units Meet Or Exceed CSA and UL Safety and Performance Standards in the US and Canada
- Complete Parts Availability

Patio Comfort Natural Gas Heaters

Patio Comfort outdoor comfort heaters are also available for natural gas fueled residential and commercial installations. Our natural model NPC-05 models are constructed of the highest quality components for durability, maximum performance, safety, and long life. Our Model NPC05 AB and SS are the only natural gas patio heaters available that includes a commercial quality U.S. Made "MB Sturgis" 12 foot steel lined hose, two solid brass quick couplers, and solid brass safety shut off valve for added safety, portability, and convenience. The NPC-05 SPP permanent mount heater also includes an installation kit.

Patio Comfort Portable Propane Heaters

All Patio Comfort propane powered "PC- 02 Model heaters are easy to move with our standard portable wheel kits. Our heaters are designed with long-term durability, safety, and performance in mind. Our painted heaters are "powder coated" to compliment your patio décor and for added durability. All major components and fasteners used in our heaters are made from commercial grade aluminum, stainless steel, aluminized steel, or brass. We supply the right equipment. You supply the party!

Patio Comfort Portable Outdoor Table Top-Model PC TT

When a full size "lifestyle" heater isn't required, take a close look at our Patio Comfort Table Top Heater. This "Mini" outdoor table top provides a 360 degree circle of radiant heat that will heat a six to seven foot circle in minimal wind conditions. Our PC TT is perfect for smaller outdoor dining areas, or for any of your outdoor activities. The PC TT is designed for outdoor use only with a standard 16 oz. throw away cylinder (not inc.) For your safety all Model PC TT's include a tip over sensor and "ODS" (Oxygen Depletion Sensor) to immediately turn off the unit if it should fall over or senses too little available oxygen.

