



W Z R I S E

VANITIES WALL

location:
DAMP

SPECIFICATIONS:

DESCRIPTION

2-4 light vanity luminaires featuring handcrafted glass.
Multilight version of 1WZ Rise sconce.

LAMPING

Standard: 60W A15 or A19 120V incandescent, suitable for dimming.

GU-24 CFL: Self-ballasted GU-24 lampholders. 13W max, 120V.
lamps not included.

LED: 10W GU24 LED Lamp 120V, dimmable, included.

DIFFUSER

Shade shall be handcrafted Opal Matte glass.
3.5" x 3.5" x 4.75" H, spaced 7.875" apart on center.

CONSTRUCTION

Fixture utilizes die-cast arm assembly and stamped
steel canopy (4.75" H), with plated metal finish.

METAL FINISH


Fixture shall be finished in Bronze, Chrome or Satin Nickel.

MOUNTING

Installs directly to a 4" octagonal outlet box.
Orient upward or downward, wall-mount only.

LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).

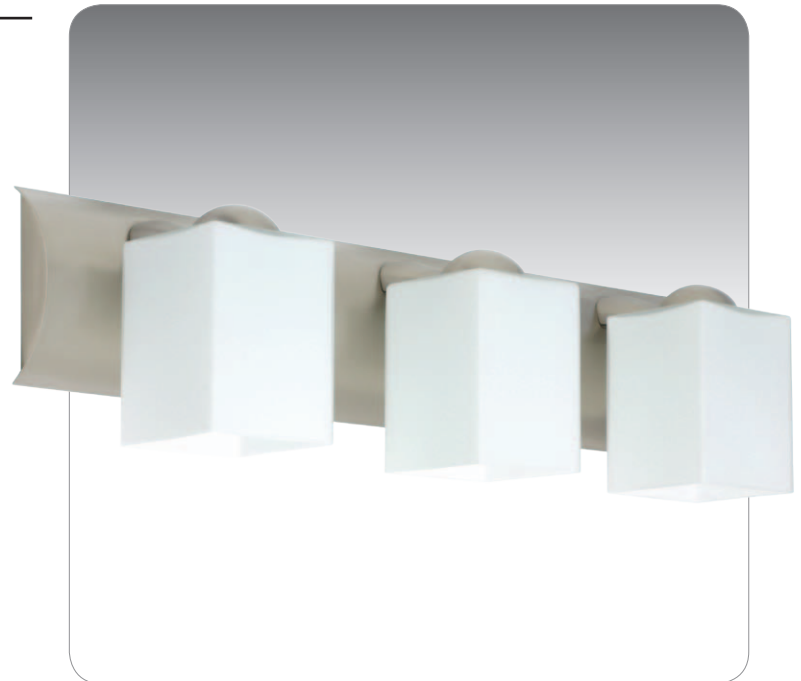



RISEI SHOWN IN OPAL MATTE (449807) IN DOWNWARD ORIENTATION

ORDERING:

FIXTURE	-	GLASS OPTIONS	-	LAMPING OPTIONS	-	METAL FINISH
2WZ 2 Light		449807 Opal Matte		(blank) 60W A19 Incan		BR Bronze
3WZ 3 Light				GU24 13W GU24 120V		CR Chrome
4WZ 4 Light				LED 10W LED 120V, dimmable		SN Satin Nickel

Ex. 3WZ-449807-SN

Rise 3-Light Vanity w/ Opal Matte Glass,
Satin Nickel Finish



3WZ: 22.4375" L



4WZ: 30.3125" L



LED SCONCES:

- Internal driver integrated in the lamp, GU24 base
- Total power of only 10 watts
- Dimmable with a standard dimmer
- Rated life: 30,000 hours
- Frosted acrylic diffuser
- 800 lumens
- CCT: 2800° Kelvin
- CRI: 80+

Project Information:

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 10/14