




ASSEMBLY INSTRUCTION MODEL ADD-331-AG-SP



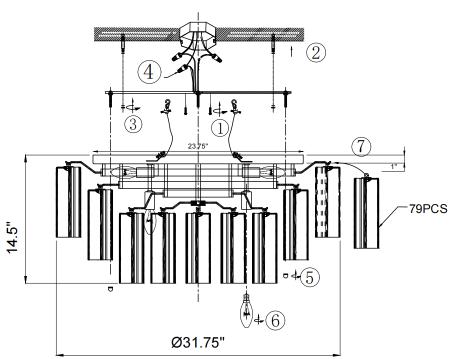

All electrical components must be

installed by a licensed electrician

in accordance with the National

Electric Code and the appropriate

local electrical codes.



You will need 16 Candelabra Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE (This fixture is Damp rated)

Ø806 [Ø31 $\frac{3}{4}$ "] Clear Glass Blush Glass Tier#1 Tier#2 Tier#3 Tier#4 Center

Dress the glass starting from the center. Alternating between Clear and Blush glass.

How to Install

- Place the mounting plate over the outlet box and mark four points on the ceiling at the same distance as between the holes on the mounting plate.
- 2.Drill the holes at the marked points and insert the anchors into it.
- 3.Attach the mounting plate onto the outlet box and secure with the anchor screws.
- 4.Hang the canopy onto the mounting bracket by hooking the cable wire into the slots as shown.After the wire connection is made, raise the canopy up to cover the outlet box and secure with the cap nuts.
- 5.Install recommended bulb into the socket.
- 7.Starting from the bottom.

 Dress the glass as illustrated.

Glass Sets


- **1.** 40pcs Clear glass 2 3/4x7 3/4"
- **2.** 39pcs Blush glass 2 3/4x7 3/4"

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov





PART NUMBER MODEL ADD-331-AG-SP

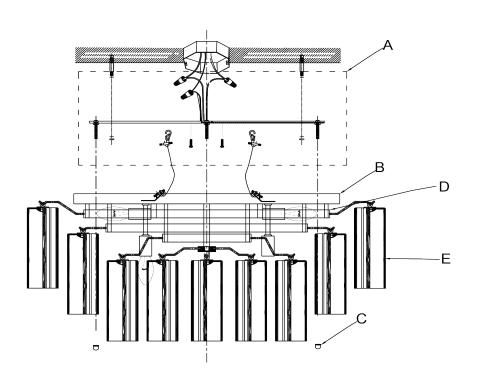

Part Number

Part Numbers

- A. Mounting hardware include:
 - (1)mounting bracket
 - (3)wire nuts
 - (4)wall anchor/screw
- B. (1)-Canopy,D23.75*H1" (XBN331AGCAN23.625IN)
- C. (4)-Cap nut
- D. (1)-Frame
- E. (40)-Clear Glass,D2.75" * H7.75" (XBN300AGCLGLA7.75IN) (39)-Blush Glass,D2.75" * H7.75" (XBN300AGBHGLA7.75IN)