



Thank you for choosing our product(s). Our Company is actively involved in every step of the production.

Our product(s) are designed to be utilized for every application that graces your home or business.

We pride ourselves in providing the most prompt and courtesy service to all of the valued customers.

Please find the enclosed detailed instruction and read carefully for proper installation.

If you have any questions, please contact the retailer Where the purchased was made.



SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF.BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.

CAUTION

- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit : 110 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.


Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions.

where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued customers.

(01)

Frame Assembly Diagram

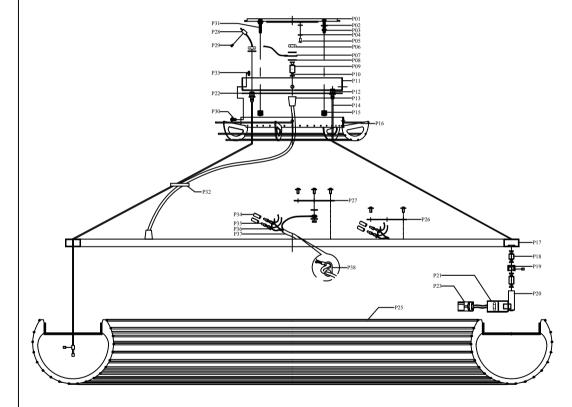

(02)

Step 1

Please use the parts list to ensure you are not missing any parts.

2114G52		PARTS LIST			
part	picture	Description	Parts Number	Qty	Check list
ZA		Electrical box(not include)		1	
ZB		Ground wire		1	
ZC		Junction Caps		3	
ZD(P01)	\times	Mounting bracket(L7.5"*W7.5")		1	
ZE(P11)		Canopy(Ø7.9"H1",Chrome)		1	
ZF(P15)		M6 Knurled nut		4	
ZG	كسس	Mounting bracket screw		2	
P01	>	Mounting bracket(L7.5"*W7.5")		1	
P02	0	Washer		4	
P03		M6 Hex nut		4	
P04	*****	M4 Lock washer		2	
P05	Ð	Ground screw		1	
P06		M10 Hex nut		25	
P07	\sim	GND		1	
P08	*****	M10 Lock washer		26	
P09	()))))))))	M10 Nipple (L0.6")		46	
P10		M10 Rubber gasket		140	
P11		Canopy(Ø7.9"H1",Chrome)		1	
P12		Cable adjustment bolt		4	
P13	0	Power wire adjustment bolt		2	
P14		L122" Steel cope		4	
P15	Î	M6 Knurled nut		4	
P16		Iron crystal frame body with crystal (Ø8.1"H1.9")		1	
P17	0	Pipe ring body(\$\$1"H0.6")		1	
P18	0)))))))	M10 Nipple(L0.4")		20	
P19	•	Coupling(Ø0.6"H0.4")		20	
P20		Iron coupling(L0.5"W0.5"H0.4")		20	

(03)

2114G52 D52" H7.1" L20

Part	Picture	Description Parts Number		Qty	Check list
P21	0	Socket (Ø0.9"H1.7",Chrome,Iron)		20	
P22	(· · · · · · · · · · · · · · · · · · ·	Round stainless steel plate (\$\$\phi_7.9"T0.039")		1	
P23		G9 Socket		20	
P25		Metal crystal frame body with crystal (\$\$8.9"H7.2")		1	
P26	_	Two holes steel bracket B(L3.3"W1.1")		3	
P27	•••	Two holes steel bracket B(L3.3"W1.1")		1	
P28	Ĩ	Wire rope clamp		8	
P29	(IIII)	M4 Nipple		32	
P30	() IIIII	M4 Phillip flange bolt (L0.3")		13	
P31	() IIIII	M4 Phillip flange bolt (L1")		4	
P32	\bigcirc	Plastic washer		2	
P33	XX	M4 Hex nut		5	
P34	0	Heat shrink tubing		8	
P35		Junction caps		8	
P36	ð	Cable tie		8	
P37		Clear Round Electrical Wire (L137.8",18#, Clear)		1	
P38	00	Cable buckle		2	
P39		Allen key		1	

(04)


2114G52 d52" H7.1" L20				2114	4G52 d52" h7.1	″ L20				
part	picture	Description	Parts Number	Qty Check list	part	picture	Description	Parts Number	Qty	Check lis

(05)

(06)

Step 2

Canopy Installation Instruction

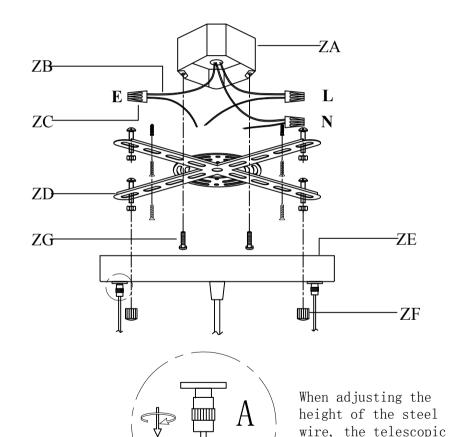

(07)

"L"=Hot wire "N"=Neutral wire "E"=GND outer ring can only twist half a turn, and then pull it up to adjust the height!!!

metal part A toothed

2114G52 D52" H7.1" L20

IMPORTANT:Test sockets with bulb before dressing the fixture.

1 .Attach the Mounting $\mbox{bracket}(\mbox{ZD})$ to the electrical $\mbox{box}(\mbox{ZA}).$

2 .Pull wires up through the Junction $\operatorname{Caps}(\operatorname{ZC}).$


3 .Attach the Canopy(ZE) to the ceiling panel.

4 .Make the electrical connections as detailed in the drawing above.

(08)

Step 3

Frame Assembly Diagram

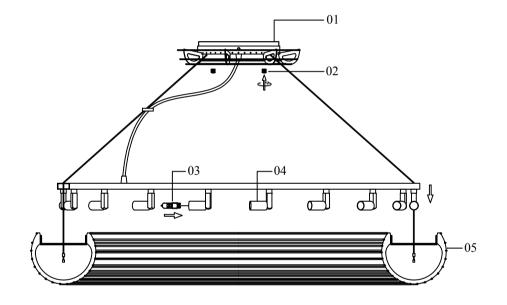

(09)

 $2114G52 \ \text{D52'' H7.1'' L20}$

Frame Assembly Instructions

Installation:

Please read all instructions carefully. Before you proceed to install make sure that the power supply is turned off and remains off until installation is complete. Please note that each part has been assigned a number. Please proceed in a numerical order.

 Lock the One end thread pipe(04) into Metal semicircular body, then use
Install G9 Bulb(03) to G9 Socket(04).
Put the Light body ring on Metal crystal frame body with crystal(05).

3. Use Knurled nut(02) to fasten $\mbox{Canopy}\,(01)$ together with Mounting

(10)

bracket of Ceiling panel.

Congratulations !

You are now done installing your Elegant Lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

11

Thank you.

2114G52 D52" H7.1" L20

Cleaning and Maintenance of Chandelier Frame The finish on our chandelier frames and fixture frames is protected by a durable coating of lacquer. To clean, use a clean soft, dry cloth. Do not use any metal polishes, cleaners, abrasives or any substance which could remove the protective finish. Failure to follow these instructions automatically voids the guarantee.

Cleaning and Maintenance of Crystals Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

To Order Crystal Replacement Parts Should you require replacement crystals or pins (the metal connectors attaching the crystals), contact the store where the product was purchased or contact us . For ease of ordering, you may use the original crystal trimming instructions provided with this product and circle the items you wish to order, indicating the quantity by writing the number needed adjacent to the circle . You will be contacted with prices prior toshipment. All orders must be pre-paid.

(12)

Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of one (1) year from the date of purchase. Our company will, at its option, repair or replace any frame that has a defect in the materials or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department. A written return authorization form will be sent to you with specific instructions.

(13)

2114G52 D52" H7.1" L20

Returns and Conditions of Warranty

Returns must be pre-authorized by contacting our customer service department. Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reseserve the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warrantee, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.

(14)