

CORTANA

PD82732-UNV-010

PENDANTS

PROJECT



PD82732-WH-UNV-010

White



PD82732-BK-UNV-010


Black

SPECIFICATION DETAILS


Fixture Dimensions	D32-1/4" x H2-1/2"
Light Source	LED with DC Driver
Wattage	55W
Total Lumens	4800lm
Delivered Lumens	BK-2280lm; WH-3060lm;
Voltage	120-277V
Color Temperature	3000K
CRI (Ra)	90CRI
Optional Color Temps	2700K - 5000K Available, Minimum Order Quantities Apply
LED Rated Life	50,000 hours
Dimming	100% - 10%, TRIAC or ELV Dimmer (Not Included) or 0-10V Dimmer (Not Included)
Diffuser Details	Frosted Acrylic Diffuser
Adjustable	Yes
Wire Length	120" Max
Wire Type	Clear Coaxial Wire
Minimum Hang Height	24"
Sloped Ceiling Adaptable	Yes
Location	Dry
Illumination Direction	Downlight
Canopy Dimensions	D11-7/8" x H1-5/8"
Paint Finish	BK01; WH01;
Material	Aluminum + Acrylic
CEC Title 24 JA8	Yes, JA8-2022

DESCRIPTION

A curved band of powder-coated aluminum arcs around a central void forming and encapsulating an illuminated ring. Held within the perimeter structure of the CORTANA pendant is a circumferential LED light array spreading uniform radiance via the polymeric diffuser loop. Available in multiple sizes.

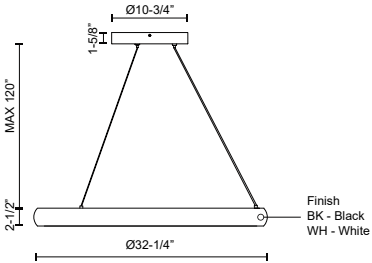

Side Canopy Option

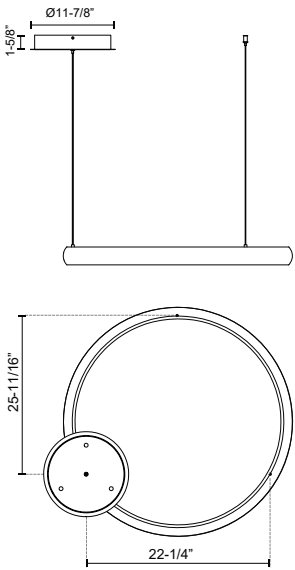

KUZCO

CANADA: 19054 28TH AVENUE - SURREY, BC V3Z 6M3
USA: 3035 E. LONE MOUNTAIN ROAD - LAS VEGAS, NV 89081

WWW.KUZCOLIGHTING.COM

© 2019 KUZCO LIGHTING. ALL RIGHTS RESERVED.

COMMENT