

ASSEMBLING & INSTALLATION INSTRUCTIONS PRODUCT#47195

47196 CHAIN HANG FIXTURE

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .
ATTENTION! COUPER LE COURANT AU FUSIBLE OU LE DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig.2)

1. Attach the loop(D) to top coupling of lamp body by turning it clockwise until tight.
2. Using proper chain pliers to open one end link of the chain(C) provided and connect to the fixture loop (D). Close the link. By measuring, determine correct number of links needed for proper hanging height. Using proper chain pliers disconnect and discard remaining chain.
3. Lace the fixture wires through the chain.
4. Open the other end link of the chain(C) and hang the lamp body on the loop at the canopy(A). Close the link.
5. Install the light bulbs in accordance with the fixture specifications
NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!
6. Raise the glass(E) insert the lamp holder and then the spring claw will hold back the end of glass.

HANGING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old single bar.
2. Carefully unpack new fixture and lay all the parts on a clear surface.
3. Attach the mounting screw part way into the side hole of the crook cross bar, then lock it securely with hex nut until becoming. Attach the cross bar to the junction box using two box screws as shown. The side of the cross bar marked "GND" must face out. **The junction box is not included.**
4. While holding the canopy and lamp cluster towards the ceiling, connect the electrical wires as Shown in Fig.3, making sure that all wire connectors are secured. You may have to wrap the connections with electrical tape. If there is a Ground Wire (green or bare copper) in your outlet box, connect the fixture's Ground Wire to it. Otherwise connect fixture's ground wire directly to the mounting strap with the Green Screw provided. After wires being connected, tuck them carefully inside the Junction Box.
5. Then cover the junction box with canopy, aligning the screw of cross bar with the hole of canopy and lock it with brass ball nut(B).

Your installation is now complete Return power to the junction box and test the fixture.

Fig.1

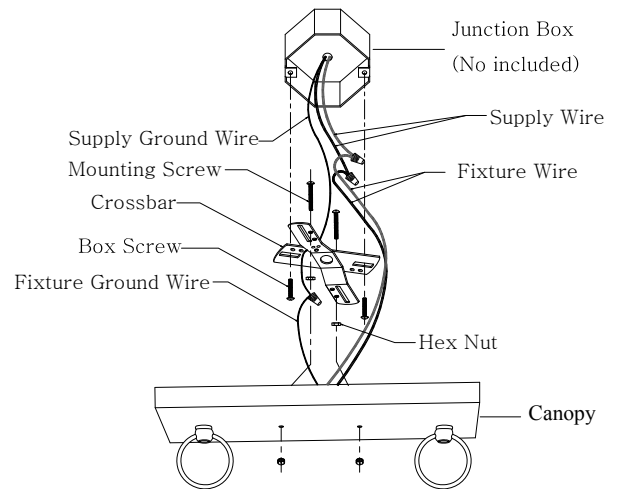


Fig.2

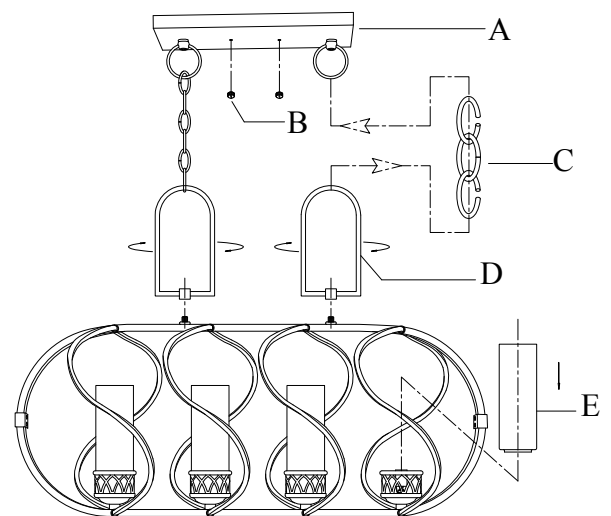


Fig.3

