

Shown in Matte  
Black with Walnut  
Tone Blades



# Ariella - LK



Elevate your space with the Ariella ceiling fan, a sleek, contemporary centerpiece boasting an eight-blade design and optional light kit for superior airflow and sophistication. Engineered for diverse environments, including wet locations, it offers five-body and seven-blade finishes to complement any decor in any setting. The perfect medley of options gives you the choice and range from the sleek, modern look or warm rustic style to be the perfect finishing touch to your indoor and outdoor designs.

## Product Features



DC  
Motor



Wet  
Location



Silent



LED  
Lamp



Dimmable  
Lamp



Remote  
Control



Optional  
Wall Control




30° Slant  
Ceiling Canopy




Optional 60° Cathedral  
Ceiling Canopy



Unipack  
Shipping

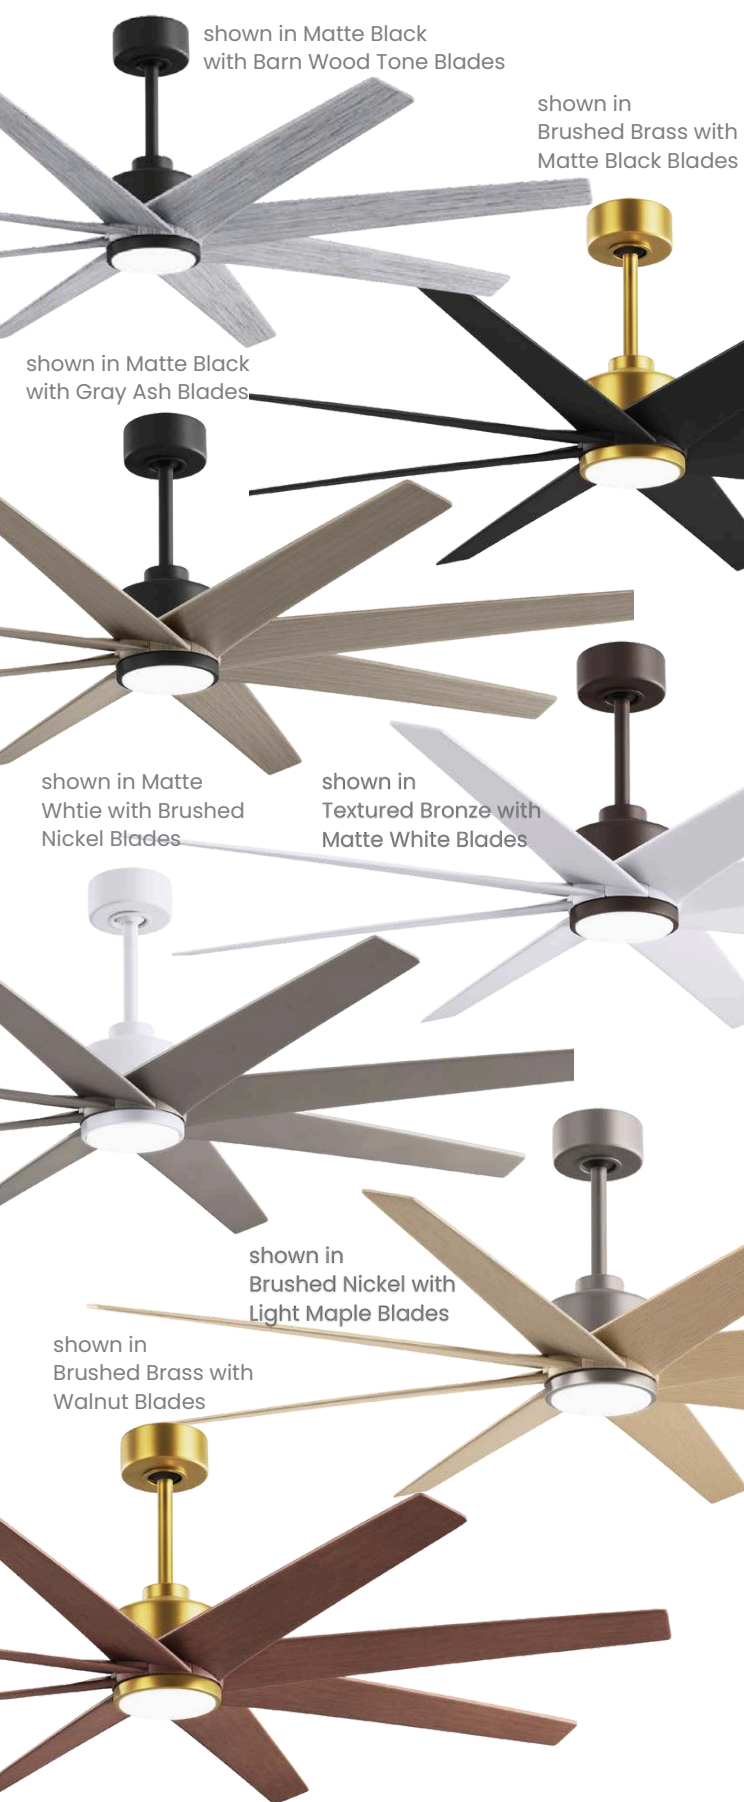

## Blade Options

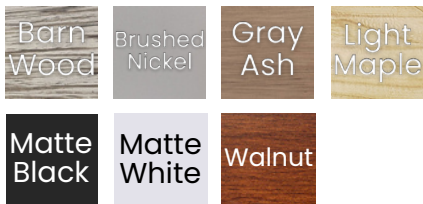

# Ariella - LK

## FINISH AND BLADE OPTIONS

SKU#	AKTP-XXXX-XXX-64 (Model+Finish+Blade+Blade Size)	
Standard Finishes	Brushed Brass Brushed Nickel Matte Black Matte White Textured Bronze	<b>BRBR</b> <b>BN</b> <b>BK</b> <b>MWH</b> <b>TB</b>
Blade Finishes	Barn Wood Tone Brushed Nickel Gray Ash Tone Light Maple Tone Matte Black Matte White Walnut Tone	<b>BW</b> <b>BN</b> <b>GA</b> <b>LM</b> <b>BK</b> <b>MWH</b> <b>WN</b>
Fan Diameter	64 inches / 162.56 cm	<b>64</b>

## TECHNICAL SPECS

Fan Diameter	64 inches / 162.56 cm	<b>64</b>
Blade Material	ABS	
Overall Drop	9 inches / 23 cm + downrod length	
Fan Weight	28 lbs	
Downrods Lengths Field cuttable Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	1 inch	
Voltage	110	
Motor Type	DC	
Environment	Wet location. All weather blade system. Neither outdoor coastal, saltwater nor chlorine compatible	
Ambience	Silent	
Safety Certification	UL / CUL	
Warranty	Limited Lifetime	

## NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Diameter	64 inches / 162.56 cm
RPM (Low / High)	50 / 105
CFM (Low / High)	3343 / 6862.5
Watts (High)	33.11
CFM/Watt (High)	246
Blade Pitch	18°

## LIGHT KIT PHOTOMETRICS

Lamping (Replaceable)	Integrated LED
Remote Dimmable	YES
Delivered Temperature in K	Variable
CRI	90
Watts	22
Hours	30,000

## Delivered Lumens

2700K	3000K	4000K	5000K	6500K
1063	1088	1234	1221	1107

## STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm
Vaulted ceiling canopy for up to 30°

Black 6-speed RF remote control with reverse



## ACCESSORIES

Decora-style, 3-speed, non-dimmable wall control




60° cathedral ceiling canopy mounting system



# Ariella - LK

## TECHNICAL SPECIFICATIONS

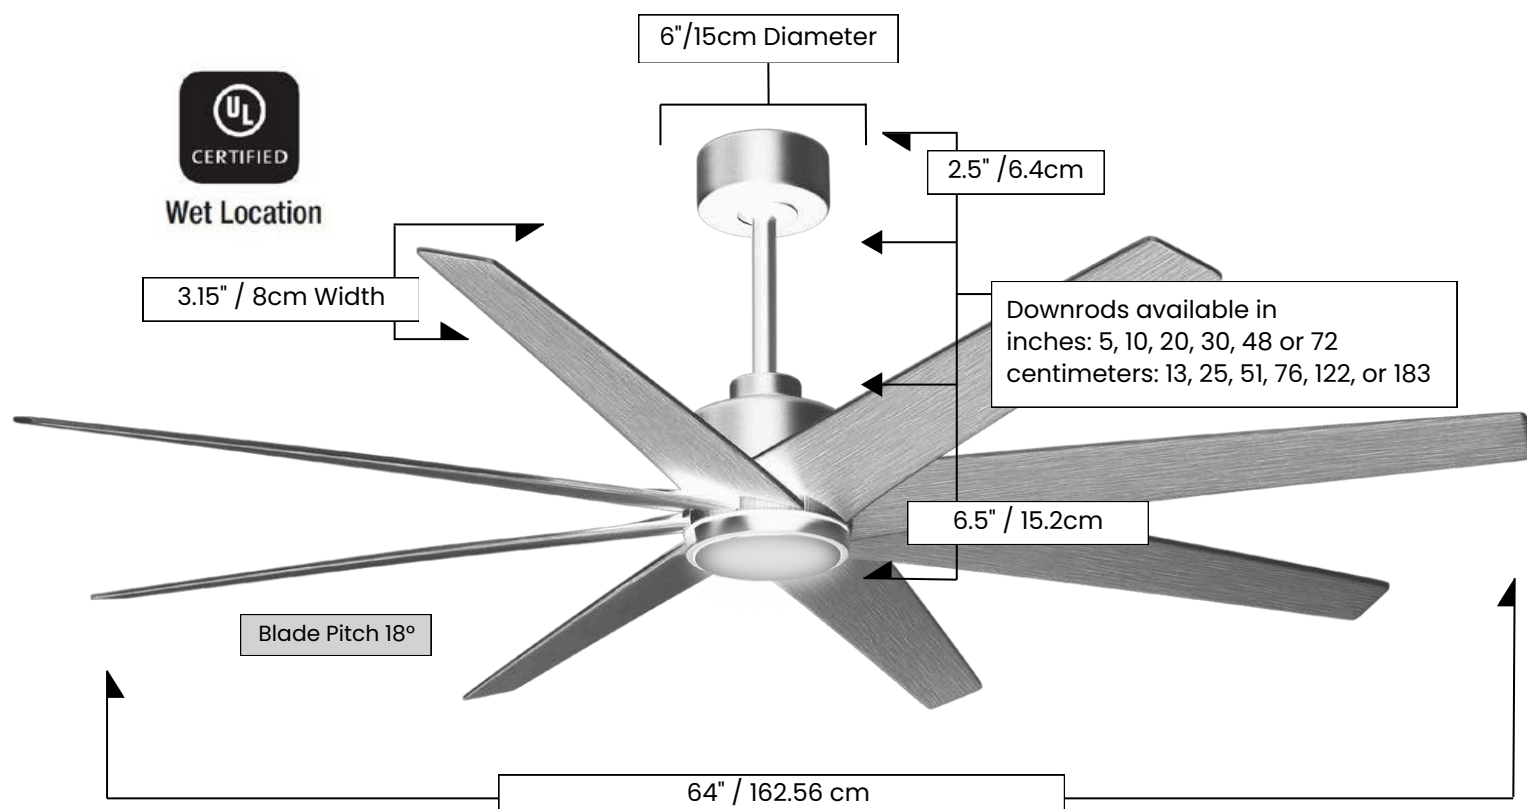

CEILING PITCH TABLE	
0/12	0 degrees
1/12	4.76 degrees
2/12	9.46 degrees
3/12	14.04 degrees
4/12	18.43 degrees
5/12	22.62 degrees
6/12	26.57 degrees
7/12	30.26 degrees
8/12	33.69 degrees
9/12	36.87 degrees
10/12	39.81 degrees
11/12	42.51 degrees

CEILING HEIGHT / DOWNROD TABLE	
Ceiling Height	Downrod Lengths <i>Field cuttable. Non-threaded</i>
10 ft or less	5 inches / 13 cm <i>Use safety cages if applicable</i>
10 -12 feet	10 inches / 25 cm
13 feet	20 inches / 51 cm
14 feet	30 inches / 76 cm
15 feet	48 inches / 122 cm
16 feet +	72 inches / 183 cm

### Matthews Fan Company

1881 Industrial Drive

Libertyville, IL 60048

Tele: 847.680.9043

Fax: 847.680.8140

[www.matthewsfanco.com](http://www.matthewsfanco.com)

© 2023 Matthews Fan Company. All rights reserved.

