

Unique and versatile, the fan head of the Bianca Directional ceiling fan can be infinitely positioned in a 180-degree arc, forward and reverse, to provide maximum, directional airflow. The Bianca can be hung in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any room. Constructed of cast aluminum, heavy spun and stamped steel, the Bianca Directional carries a limited lifetime warranty.

















all Unipacl

Product Features



## BIANCA DIRECIONAL

FINISH AND BLADE OPTIONS			
SKU#	BD-XXXXXX-XX (Model+Finish+Blade)		
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN	
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Copper Polished Chrome Damp Brushed Nickel Damp Gloss White	BRBR BRCP PB CR CP CRDAMP BNDAMP WH	
Fan Blade	Solid Mahogany Wood Blade Metal Blade	WD MTL	
TECHNICAL SPECS			

recinical speed			
Fan Weight	7 lbs		
Voltage	110 or 220		
Motor Type	AC		
Oscillation	No		
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30 centimeters: 13, 25, 51, 76		
Downrod Diameter	.75 inch		
Overall Drop	Metal Blades:	13 inches / 33 cm + downrod length	
	Wood Blades:	16 inches / 41 cm + downrod length	
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.		
Ambience	Soothing White Noise		
Safety Certification	UL / CUL		

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA			
Fan Head Options	Solid Mahogany Wood	Metal with Guard	
Fan Diameter	16 inches / 41 cm	13 inches / 33 cm	
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm	
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines	
RPM (Low / High)	926 / 1280	615 / 1149	
CFM (Low / High)	1568 / 2274	814 / 1199	
Watts (High)	47.46	49.00	
CFM/Watt (High)	47.91	24.47	
Blade Pitch	19°	31°	

Warranty | Limited Lifetime

#### STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Flat ceiling canopy (Not compatible with vaulted ceiling canopy) Decora-style, 3-speed wall control in white



### **Standard Finishes**





Brushed Nickel Special Order Finishes


Brushed Polished Brass Brass

Brushed Copper Polished Copper Polished Chrome Polished Chrome Damp Brushed Nickel Damp

Gloss White

# Bianca Direcional

### TECHNICAL SPECIFICATIONS

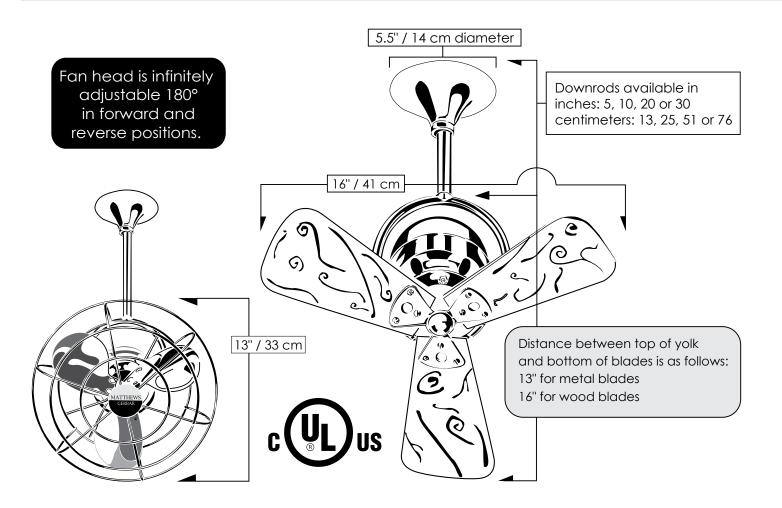

CEILING PITCH TABLE		
0/12	0 degrees	
1/12	4.76 degrees	
2/12	9.46 degrees	
3/12	14.04 degrees	
4/12	18.43 degrees	
5/12	22.62 degrees	
6/12	26.57 degrees	
7/12	30.26 degrees	
8/12	33.69 degrees	
9/12	36.87 degrees	
10/12	39.81 degrees	
11/12	42.51 degrees	

CEILING HEIGHT / DOWNROD Table		
Ceiling Height	Downrod Lengths Field cuttable. Non-threaded	
10 ft or less	5 inches / 13 cm Use safety cages if applicable	
10 -12 feet	10 inches / 25 cm	
13 feet	20 inches / 51 cm	
14 feet	30 inches / 76 cm	

### **Matthews Fan Company**

1881 Industrial Drive Libertyville, IL 60048 Tele: 847.680.9043 Fax: 847.680.8140 www.matthewsfanco.com © 2020 Matthews Fan Company. All rights reserved.

