

INSTALLATION INSTRUCTIONS

Item# 4342-593 (New. 3/11/2019)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut **off** power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Place the candle covers (H) over the sockets (I)
4. Install (2) two candelabra base bulbs up to 60 watts **each** or CFL or LED equivalent (not included) in accordance with the fixture specification — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

MOUNTING THE FIXTURE (Fig.2)

5. Thread one end of nipple (D) into the crossbar (C) until snug.
6. Place lock washer (B) and hex nut (A) over end of nipple (D) protruding through crossbar (C), then thread hex nut (A) until tight.
7. Attach the crossbar (C) to the junction box using the mounting screws (E) (size: #8-32N*L0.5"). The side of the crossbar marked "GND" must face out.

CONNECTING THE WIRES (Fig. 3)

8. At this point, connect the fixture wires as shown in Fig.3, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the Crossbar (C) using the green screw provided. After the wires are connected, tuck them carefully inside the outlet box.


FINISHING THE INSTALLATION (Fig. 2)

9. Place the back plate (F) onto nipple (D) and secure it with finial (G).

Your installation is now complete. Return power to the outlet box and test the fixture.


Note: Illustration (Fig.1) (Fig.2) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

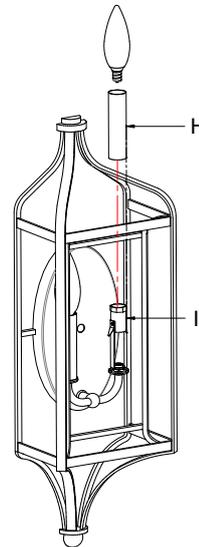

CCV22085P-593

Fig. 2

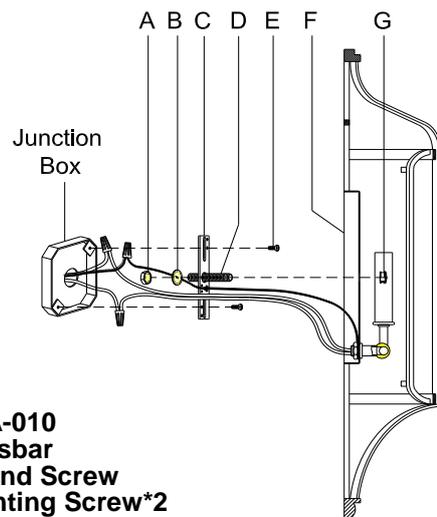

Set# A-010
- Crossbar
- Ground Screw
- Mounting Screw*2

Fig. 3

