
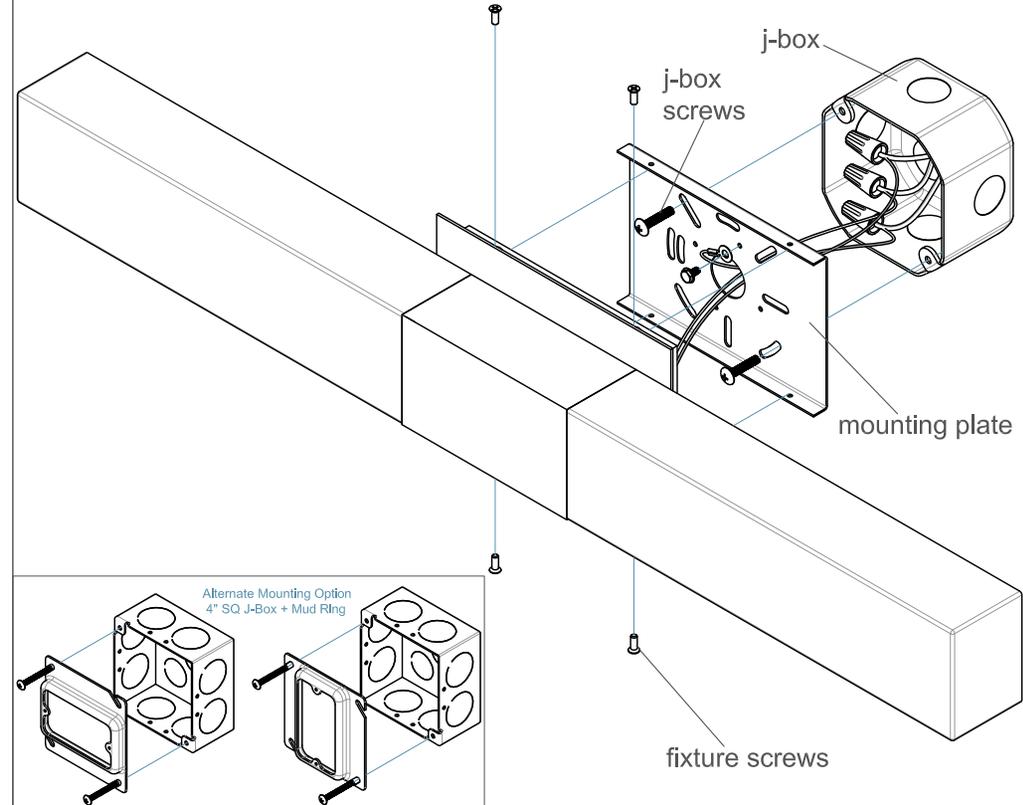


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER PRIOR TO INSTALLING OR SERVICING THIS FIXTURE.

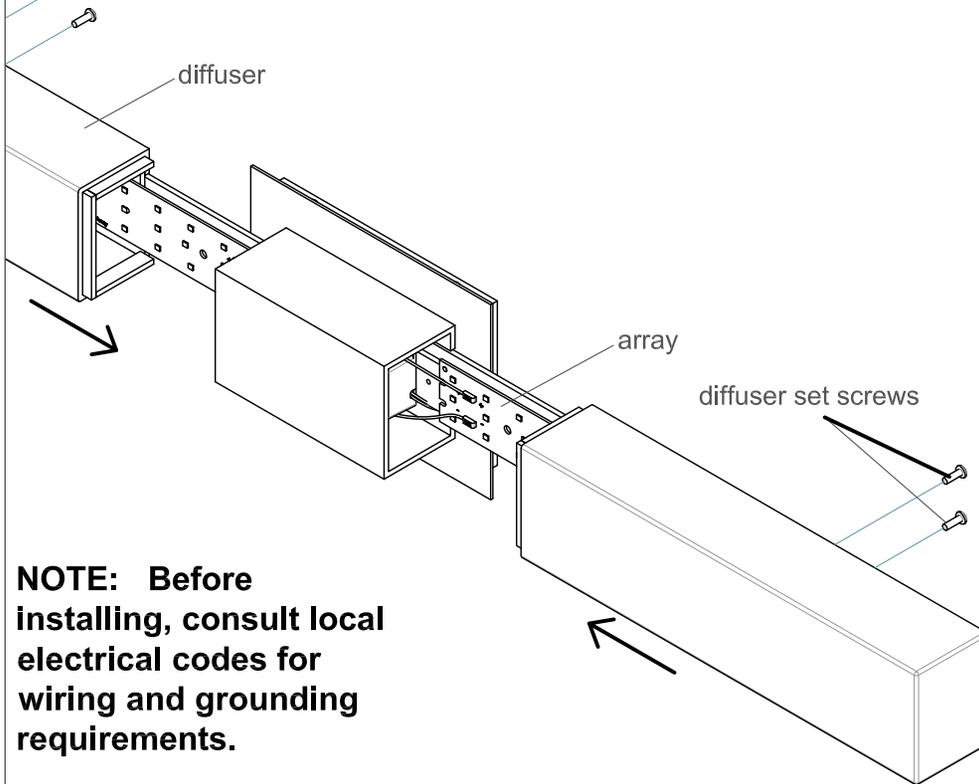

Installation Steps

1. Carefully unpack your new fixture and lay out all the parts on clean surface. Take care not to lose any small parts necessary for installation.
2. Slide the diffusers onto the fixture arms and secure them in place with the diffuser set screws on the back of the fixture arms. Be careful not to scratch or damage any part of the arrays.
3. Secure the mounting plate to the wall over the j-box using the j-box screws. Mounting plate should be secured tightly against the wall.
4. Make wire connections. Attach ground wire to building ground wire using a wire nut or attach them to the mounting plate with a green ground screw.
 - **FOR DIMMING:** If using a dimmer (not included), follow wiring instructions enclosed with dimmer. Double check wiring. Tuck the wire connections neatly into the junction box. Note: For phase dimming, cap off gray and purple wires, as they are only used for 0-10V dimming.
 - **FOR NON-DIMMING:** If not using a dimming switch, with wire nuts, cap off purple and gray wires individually. Connect white wire (neutral) with white wire, black wire (hot) with black wire. Double check wiring. Tuck the wire connections neatly into the junction box.
5. Place the fixture body over the mounting plate and secure it in place with the fixture screws.
6. Turn power back on at fuse or circuit box.

**VEGA vanity
3-569-xx**

oxygen

OXYGEN LIGHTING
201 RAILHEAD RD, FORT WORTH, TX 76106
TEL. (877) 607-0202 FAX (877) 607-0203
WWW.OXYGENLIGHTING.COM

ASSEMBLY INSTRUCTIONS