
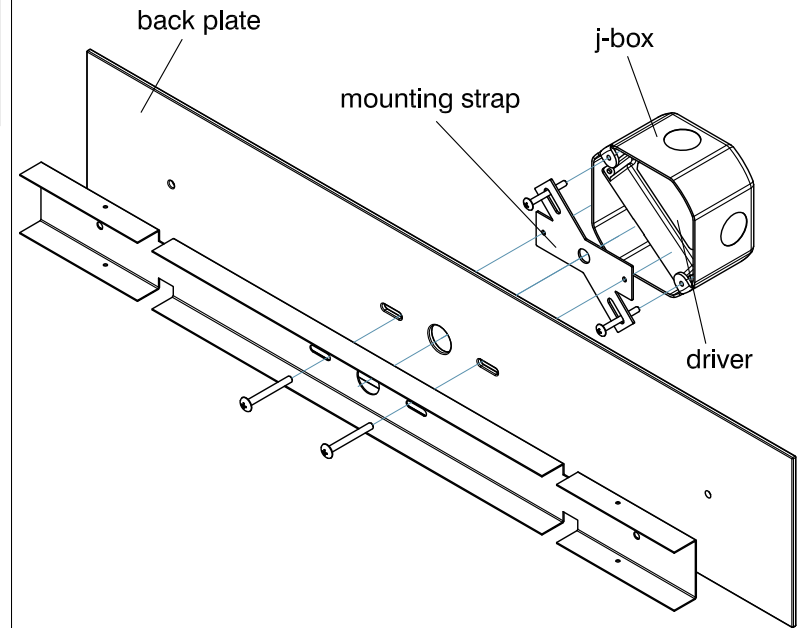


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER PRIOR TO INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

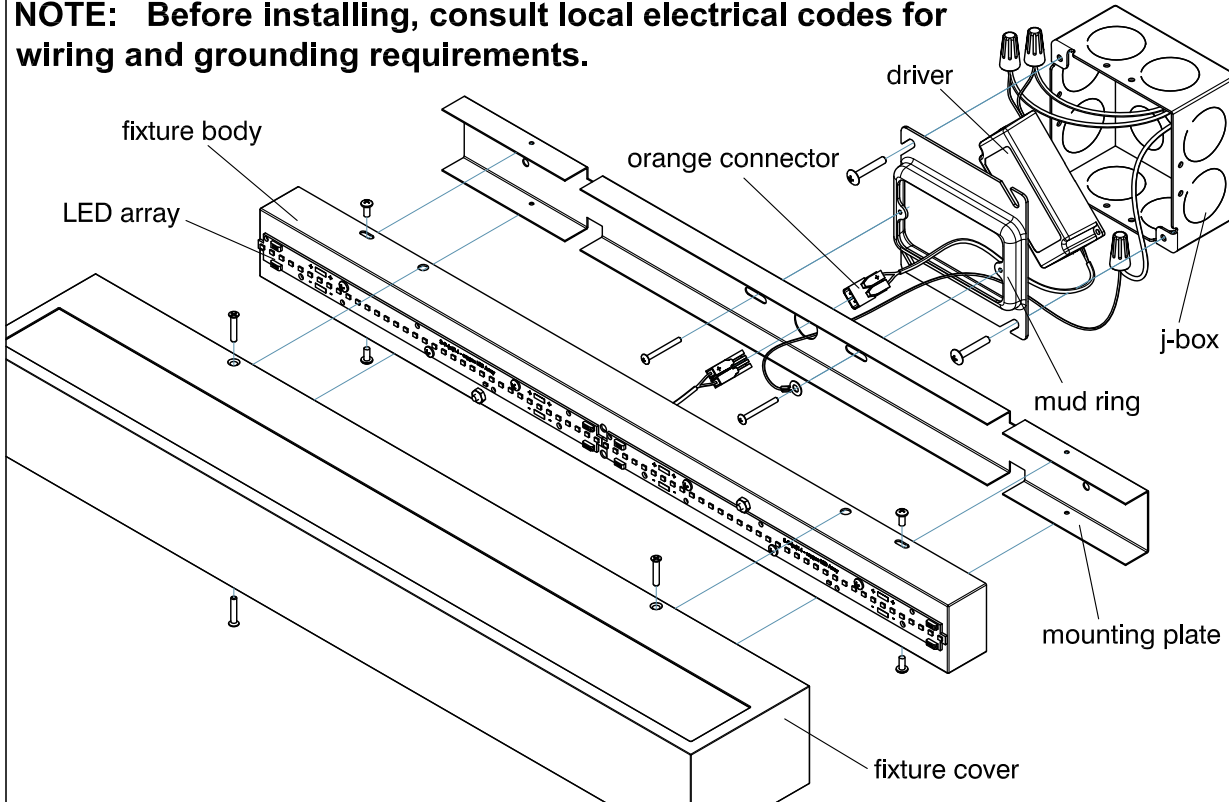

Installation Steps

1. Carefully unpack your new fixture and lay out all the parts on a clean surface. Take care not to lose any small parts necessary for installation. Disassemble fixture so that there are three major components as illustrated: mounting plate, fixture body and the fixture cover. Do not remove LED array.
2. Place driver inside j-box. Make wire connections: Attach ground wire to building ground wire using a wire nut or attach them to the mounting plate with a green ground screw.
 - **FOR DIMMING:** If using a dimmer (not included), follow wiring instructions enclosed with dimmer. Double check wiring. Tuck the wire connections neatly into the junction box.
 - **FOR NON-DIMMING:** If not using a dimming switch, with wire nuts, cap off purple and gray wires individually. Connect neutral wire (white) with neutral wire, hot wire (black) with hot wire. Double check wiring. Tuck the wire connections neatly into the junction box. Refer to driver label for wire identification.
3. Attach mounting plate to j-box with j-box screws.
4. Connect orange connectors together, and install the fixture body to the mounting plate. Fixture body should be secure against wall.
5. Install fixture cover to fixture body. Fixture cover should be secure and snug against wall.
6. Generously caulk the channel on the inside lip of the fixture body and top, bottom, and sides of fixture body to avoid water ingress with suitable RTV or silicone compound.
7. Clean up any excess caulk outside of fixture that may have squeezed out during installation.
8. Turn power back on at fuse or circuit box.

**MAIA outdoor
3-742-xx**

oxygen

OXYGEN LIGHTING
201 RAILHEAD RD, FORT WORTH, TX 76106
TEL. (877) 607-0202 FAX (877) 607-0203
WWW.OXYGENLIGHTING.COM

ASSEMBLY INSTRUCTIONS