


ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0275

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

Hardware Package (included):

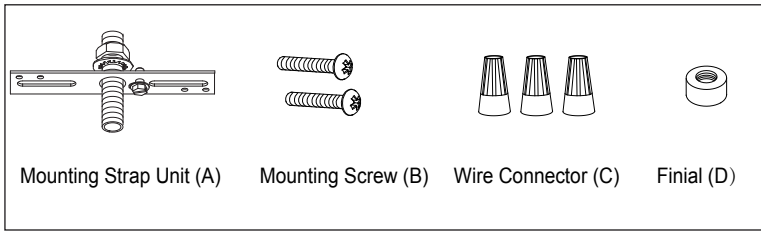


Installation Steps

Turn off the power at fuse or circuit box.

1. Attach the mounting strap unit (A) to the outlet box by using two mounting screws (B).
Note: The depth of threaded pipe on the mounting strap unit may need to be adjusted to properly fit the fixture.
2. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
 - Connect the hot wire (black insulation) from the fixture to the black wire from the power source.
 - Connect the neutral wire (white insulation) from the fixture to the white wire from the power source.
 - Attach the fixture ground wire (bare wire) to the mounting strap unit (A) with the green ground screw, then depending on local code, connect it to the house ground wire with the wire connector (C).Carefully put all of the wires back into the outlet box.
3. Attach the ceiling plate to the mounting strap unit (A) by aligning and inserting the threaded pipe from the mounting strap unit (A) into the center hole on the ceiling plate, then secure the ceiling plate with finial (D).


Turn on the power at fuse or circuit box.

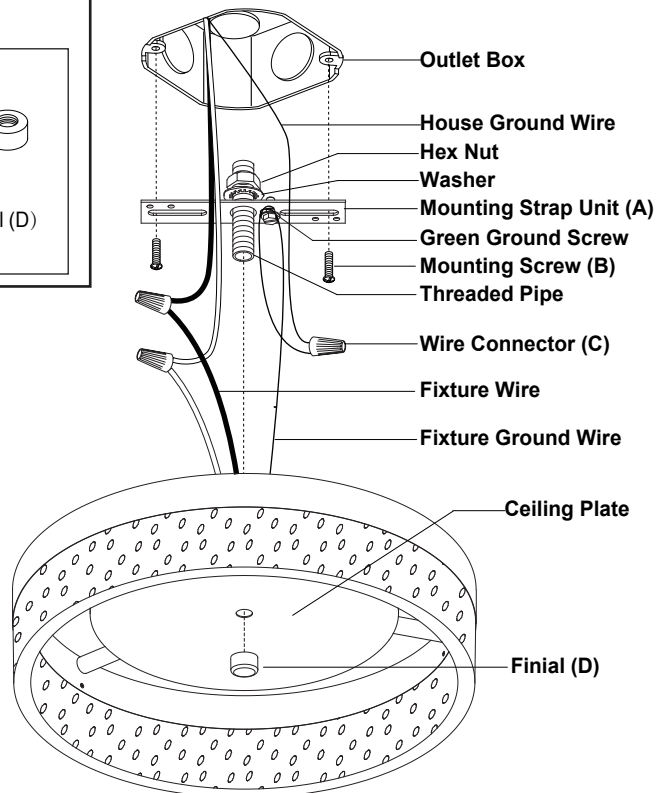


Note: Dimming range: 100% full illumination to 10% of full illumination.

The following parts are available for re-order if damaged or missing.


Spare Parts List:




Mounting Strap Unit (A)



Mounting Screw (B)




Wire Connector (C)




Finial (D)

Assembly Kit
6595MM (1 SET)

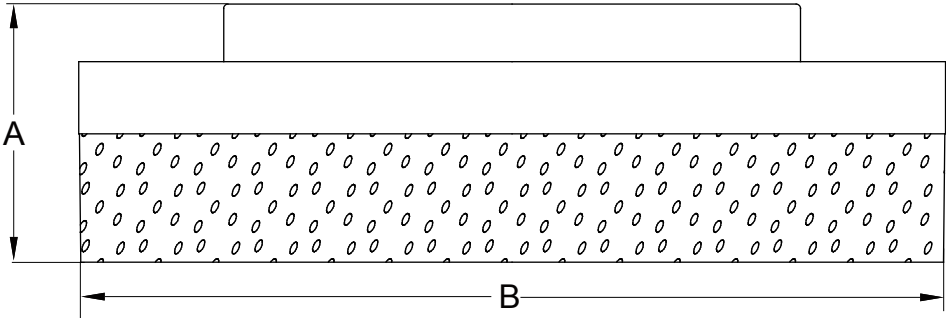

A: 3-1/2"

B: 12"

VAXCEL

221021