

# ASSEMBLY AND INSTALLATION INSTRUCTIONS




**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE:** Before installing, consult local electrical codes for wiring and grounding requirement.

## Installation Steps:

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Outlet Box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Hold the mounting plate up against ceiling outlet box, aligning the outlet box two thread holes and adjust to the appropriate location, use a pencil to mark the anchor screw holes, remove the mounting plate, then drilled holes and loaded plastic anchors. Attach the mounting plate to the outlet box with the two outlet box screws and anchor screws as shown. The side of the mounting plate marked "GND" must face to out. **The outlet box is not included.**
4. **NOTE: make wires connections:**
  - \*\*Attach fixture ground wire to supply ground wire using a wire nut or attach them to them mounting plate with a green ground screw.**
  - \*\*Attach fixture white wire from lamp body to supply white wire or ridge wire from power source with a wire nut.**
  - \*\*Attach fixture black wire from lamp body to supply black wire or smooth wire from power source with a wire nut.**
  - \*\*Observing: positive wire with positive wire, negative wire with negative wire, ground wire with ground wire.**
5. Make sure all wire connectors are secured and do not easily pull off with the slight tug. After wires are connected, tuck them carefully inside the Outlet Box.
6. Take the magnetic LED illuminant and place it on the ceiling mounting plate, , then plug it into the power plug that you connected to the power supply in the outlet box..
7. Attach the assembled shade onto the ceiling mounting plate, aligning the top studs of shade with the mounting plate's slots, now, rotate the shade until the studs are seat in the slots.
8. Your installation is now complete. Return power to the outlet box and test the lamp body.

**"To clean, wipe fixture with a damp soft cloth. Then dry immediately with a dry soft cloth. Clean glass with a mild soap. DO NOT use chemical cleaners or abrasive materials such as scouring pads or powders, steel wool or abrasive paper."**

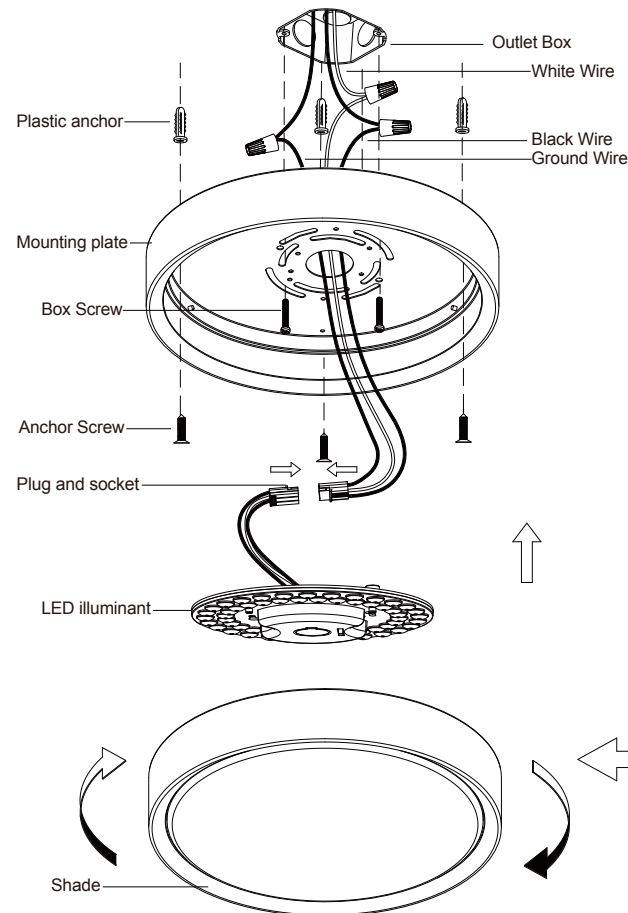

**1014F12-XX-LED**  
**1014F12-XX-XXXX-LED**  
**1014F12-XX-XX-LED**  
**1014F16-XX-LED**  
**1014F16-XX-XXXX-LED**  
**1014F16-XX-XX-LED**  
**1014F20-XX-LED**  
**1014F20-XX-XXXX-LED**  
**1014F20-XX-XX-LED**